

SANY®

SPECIFICATION



400t

90m

60+7+78m

SAC4000T8
SANY ALL TERRAIN CRANE

QUALITY CHANGES THE WORLD
crane.sanyglobal.com

It is one of the core business units in SANY Group, specializing in the development and manufacturing of high-end wheel cranes, crawler cranes and tower cranes, including the complete range of wheel cranes from 8 to 2400t, crawler cranes from 25 to 4500t and tower cranes from 6 to 185t.

三一集团旗下核心事业部，从事高端轮式起重机、履带起重机、塔式起重机系列产品的研发制造。覆盖8-2400吨全吨位轮式起重机，25-4500吨全吨位履带起重机，6-185吨塔式起重机。



SANY CRANE



Strong lifting capacity

8 section 90m boom, standard 36m fixed jib, optional 48m heavy-duty fixed jib and 78m luffing jib.

Equipped with Y-shape superlift device, the lifting capacity of long boom is more than doubled. Self dis/assembly of superlift device is realized without any auxiliary crane.

SACT adjustable counterweight technology enables repositioning with counterweight loaded. 100t counterweight moved rearward can deliver the performance of 140t counterweight, reducing two transportation trailers.

Optional wind power jib covering maintenance of 1.5MW-2.0MW wind turbines. Lifting 50t to 80m high, 40t to 90m high, and 30t to 100m high.

Excellent driving performance

Innovative six-axle chassis, all-wheel steering and four-axle drive, and a variety of steering and drive modes bring strong driving flexibility.

The new intelligent multi-mode hydro-pneumatic suspension functions real-time vehicle attitude monitoring, active lifting and variable damping adaptation, etc., making driving more comfortable and stable.

With a strong power and transmission system equipped with retarder brake, the driving safety and smoothness are greatly improved. Max. traveling speed reaches 80km/h and max. gradeability is up to 50%.

High efficiency and reliability

Multi-pump and multi-circuit hydraulic system, electro proportional and multi-level pressure control to realize speed grading and inching mobility, achieving better performance.

The new superlift stable tensioning control technology, one-key auto tensioning and swing away/back, improves the operation efficiency by 20% and the lifting performance of medium and long boom is increased significantly.

High level safety

The multifunctional wireless remote control system facilitates operation convenience and safety.

The anti-tipping early-warning system, safety protection program and fault diagnosis system make the operation safe and reliable.

The LMI system is designed with high precision, high stability and high intelligence is adopted to protect the lifting operation in an all-round way.

Equipped with adequate sensors for timely data feedback, real-time monitoring, and mastering the working state of the vehicle at any time.

起重性能强

8节主臂90m，标准副臂36m，可选重型副臂48m，塔式副臂78m；

配置Y型超起装置，不用辅助吊车可实现自拆装，长臂段起重性能增加一倍以上；

采用全新配重变位技术，100t配重带载变位1.8m后相当于140t配重能力，可节省两台运输车；

可选专用副臂，80m高吊重50t，90m高吊重40t，100m高吊重30t，满足1.5MW-2.0MW风电检修需求。

行驶性能卓越

创新六桥底盘，全轮转向、四桥驱动，多种转向及驱动模式，行驶适应能力超强；

全新智能多模式油气悬挂系统，车体姿态实时监控、主动提升和变阻尼自适应等功能，驾乘更舒适，行驶更稳定；

强劲动力及传动系统，最高行驶速度80km/h、最大爬坡度50%，配备缓速制动，极大提高行驶安全性和平顺性。

高效可靠

多泵、多回路液压系统，电比例及多级压力控制，实现速度分档和微动性优化，性能更卓越；

全新定长张紧控制技术，智能一键张紧及收/展超起，作业效率提升20%，中长臂段起重性能大幅度提升。

安全可靠

多功能无线遥控系统，起重机作业更加方便，操作更加安全；

配备防倾翻预警系统，操作安全保护程序及故障诊断系统，保证车辆的作业安全；

采用高精度、高稳定性、高智能化的力矩限制器系统，全方位保护吊载作业；

配置丰富的传感器件，及时反馈数据信息，实时监控，随时掌握整车工作状态。

SAC4000T8



SANY ALL TERRAIN CRANE
400T LIFTING CAPACITY





Overall Dimensions

整机尺寸

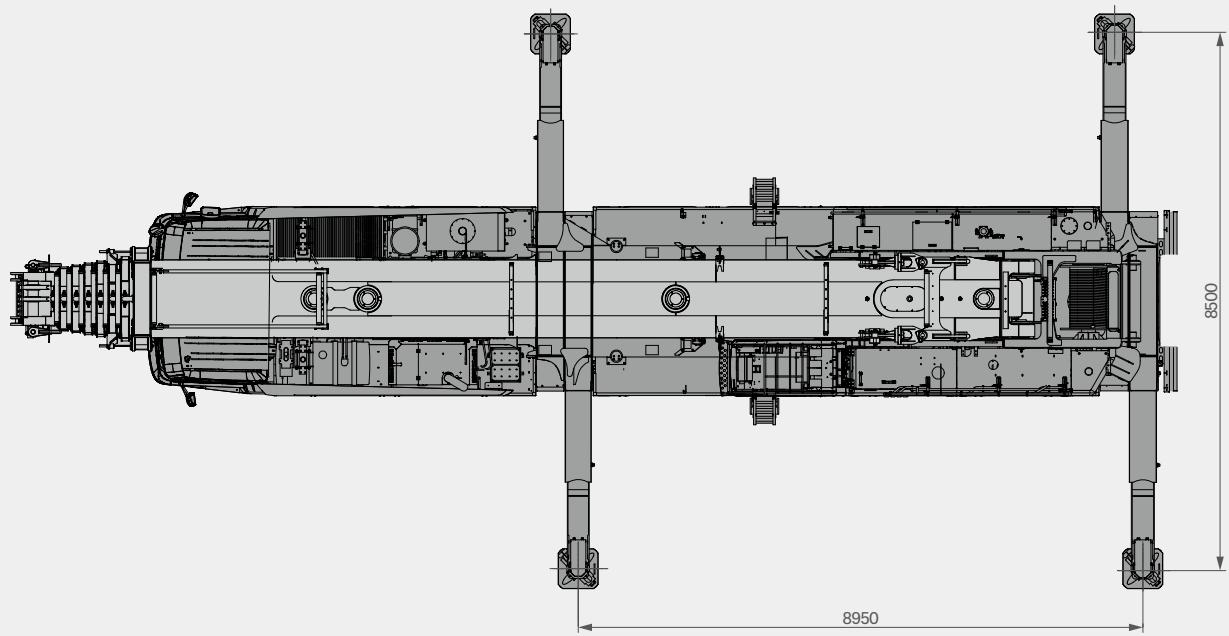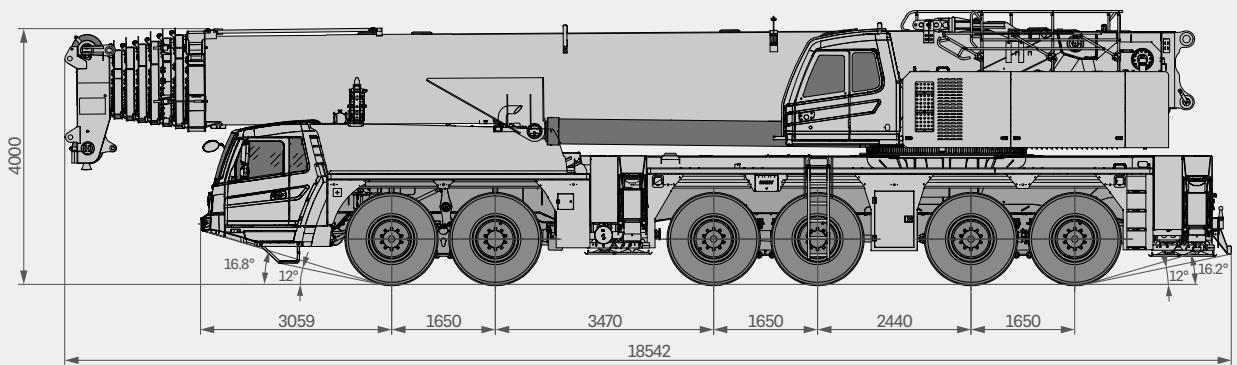

Technical Specification

整机参数

CATEGORY 类型	ITEM 项目	UNIT 单位	VALUE 参数	
CAPACITY 额定起重量	Max. lifting capacity 最大起重量	t	400	
WEIGHT 重量	Gross weight 整机总质量	kg	72000 (boom sections 4~8 removed 拆除 4~8 节臂)	
POWER (CHASSIS) 发动机参数 (下车)	Engine model 发动机型号 (排放标准)	-	Weichai WP15H660E61 (China National VI)	
	Max. engine power 发动机最大功率	kW/rpm	485/1800	
	Max. engine torque 发动机最大输出扭矩	N·m/rpm	3185/900~1400	
POWER (SUPERSTRUCTURE) 发动机参数 (上车)	Engine model 发动机型号 (排放标准)	-	Benz OM906LA.E3A/1 (EU Stage IIIA)	
	Max. engine power 发动机最大功率	kW/rpm	205/2200	
	Max. engine torque 发动机最大输出扭矩	N·m/rpm	1100/1200~1600	
DIMENSIONS 尺寸参数	Overall length 整机全长	mm	17154	
	Overall width 整机全宽	mm	3000	
	Overall height 整机全高	mm	4000	
TRAVEL 行驶参数	Max. travel speed 最高行驶速度	km	80	
	Steering radius 转弯半径	Min. steering radius 最小转弯半径	m	11.68
		Min. steering radius of boom tip 臂头转弯半径	m	14.4
	Wheel formula 车轮模式	-	12 × 8	
	Min. ground clearance 最小离地间隙	mm	300	
	Approach angle 接近角	°	16	
	Departure angle 离去角	°	12	
	Max. gradeability 最大爬坡度	-	50%	
	Fuel consumption per 100km 每 100 公里油耗	L	≤100	
	Working temperature range 使用温度区间	℃	-20~ +40	
MAIN PERFORMANCE 主要性能参数	Min. rated lifting radius 最小额定幅度	m	3	
	Tail slewing radius 转台尾部回转半径	m	6.5 / 7.4 / 8.4	
	Boom sections (Qty.) 臂节数	-	8	
	Boom shape 臂形状	-	U shape U型	
	Max. lifting moment 最大起重力矩	Basic boom 基本臂	kN·m	10682
		Full-extension boom 全伸主臂	kN·m	5998
	Boom length 臂长	Basic boom 基本臂	m	15.7
		Full-extension boom 全伸主臂	m	90
		Max. combination of boom + fixed jib 最大主臂 + 固定副臂组合	m	74.5+6+42
		Max. combination of boom + luffing jib 最大主臂 + 变幅副臂组合	m	60+7+78
		Outrigger span (Longitudinal × Transverse) 支腿跨距 (纵 × 横)	m	8.95 × 8.5
AIRCONDITIONER 空调	Jib offset 副臂安装角度	°	0, 20, 40	
	In operator's cab 上车空调	-	Heating & Cooling 制冷、制热	
	In driver's cab 下车空调	-	Heating & Cooling 制冷、制热	

Technical Specification

整机参数



Axe Load 轴荷

Axe 轴	1	2	3	4	5	6	Gross weight 总重量
Axle load 轴荷/t	8.5	8.5	8.5	9.83	9.83	9.83	54.99
Axle load 轴荷/t	12	12	12	12	12	12	72

Remark 备注:

55t weight requires removing boom sections 2-8, hook blocks, wire ropes, counterweight mount tray, superlift connector and outriggers.

72t weight requires removing boom sections 4-8, hook blocks, wire ropes, counterweight mount tray, and superlift connector.

55t 公告须拆除 2-8 节伸缩臂、吊钩、卷扬钢丝绳、配重架、超起接口装置、活动支腿等附件；

72t 公告须拆除 4-8 节伸缩臂、吊钩、卷扬钢丝绳、配重架、超起接口装置等附件。



Hook 吊钩

Load 起重量/t	Number of sheaves 滑轮数量	Rope rate 倍率	Hook weight/kg 吊钩重量
160 ○	7	14	1627
80 ●	3	7	723
32 ○	1	3	521
12.5 ●	0	1	526

● Standard 标配 ○ Optional 选配



Operations 主要动作参数

Item 项目	Max.single rope lifting speed (empty load) 单绳速度 (空载)	Rope diameter/length 钢丝绳直径 / 长度	Max. single line pull 最大单绳拉力
Main winch 主卷扬	130m/min	24mm/605m	12.5t
Luffing jib winch 变幅副臂卷扬	130m/min	24mm/640m	12.5t
Slewing speed 回转速度		1.2r/min	
Full luffing up/down time of boom 主臂起落幅时间		95s/110s	
Full extension/retraction time of boom 主臂伸缩时间		780s/780s	
Outrigger jack 垂直支腿	Extension 伸 Retraction 缩	50s 55s	
Outrigger beam 水平支腿	Extension 伸 Retraction 缩	50s 50s	

Crane Introduction

整机介绍

Carrier 下车

Driver's cab 驾驶室

- The cab is a new steel structure developed by Sany, with excellent shock absorption and sealing performance. It is equipped with pneumatic suspension driver's seat and co-driver's seat, adjustable steering wheel, large rearview mirror, comfortable headrest, demisting fan, cooling/heating A/C and stereo radio, etc. In addition, the control instruments and meters are well arranged to provide comfortable, safe and user friendly experience.
- 驾驶室为三一自主开发新型钢结构，减震性和封闭性优良，两侧外开式车门，配备气动悬置的驾驶座与副驾驶座、可调整方向盘、大视野后视镜、配有头枕的舒适驾驶椅、防雾扇、冷暖空调，立体收音机等装配，控制仪器和仪表齐全，更加舒适、安全、人性化。

Carrier frame 车架

- Developed and manufactured by Sany, the frame is optimized to anti-torsion box structure welded by fine grain high-tensile steels. The outriggers are retracted in fixed boxes placed between axle 2 and 3 and frame tail. Front and rear towing devices available.
- 三一自主研发并专业化制造，结构优化，防扭转箱型结构，细晶粒高强钢板焊接制作；支腿收缩在特制固定箱中，支腿箱位于 2 桥和 3 桥之间以及车架尾部；并且配备前后牵引挂钩。

Chassis engine 底盘发动机

- Model: Electronically controlled, in-line six cylinder, water-cooled, supercharged intercooled diesel engine.
- Power: 485kW / 1800rpm.
- Torque: 3185N·m / 900~1400rpm.
- Emission standard: complying with China National VI.
- Fuel reservoir capacity: approx. 600L.
- 型式：电控、直列六缸、水冷却、增压中冷、电喷、柴油发动机；
- 额定功率：485kW/1800rpm；
- 最大扭矩：3185N·m/ 900~1400rpm；
- 环保性：排放符合国VI标准；
- 燃料箱容量：约 600L。

Transmission 变速箱

- ZF auto transmission, with integral hydraulic retarder for wear-free brake, features a wide range of speed ratio with 12 forward speeds and 2 reversing speeds, which is adaptable to slope climbing and high-speed traveling on public roads.
- 德国 ZF 原装进口变速箱，速比范围大（12 个前进档、2 个倒挡），智能自适应换挡，一体式液力缓速器无磨损制动，极致爬坡脱困能力，既可满足低速场地爬坡又可满足公路高速行驶。

Axe 车桥

- Kessler axles with disc brake, all wheel steering. Axle 1, 3, 5, and 6 are drive axles. Axle 6 is fitted with disengagement device. Three axle drive on public roads, four axle drive on tough terrains. Axle 1 and 2 are steered mechanically with hydraulic booster; axle 3 to 6 are steered by electro hydraulic power, which helps control travel speed and provides special steering mode, featuring easy steering and flexible maneuverability.

德国 Kessler 原装进口重载车桥，盘式制动，全桥转向，一、三、五、六桥为驱动桥，其中六桥带脱开装置，正常公路行驶三桥驱动，复杂路面四桥驱动。一、二桥采用杆系反馈的液压助力转向系统，三至六桥采用电液控制转向，可进行速度控制的辅助及可选择的特殊转向模式，转向轻便，操控灵活。

Suspension system 悬挂系统

- Multi-mode height adjustable (+160mm/-130mm) hydro-pneumatic suspension devices with hydraulic lockout, which can realize five modes incl. suspension, rigid locking, auto leveling, whole vehicle rising and single point rising & lowering. It can conduct real-time monitoring of vehicle attitude, smart identifying of axle load, active rising and self-adaptability to tough terrains, ensuring smoothness and lateral stability during driving.
- 智能多模式油气悬挂系统，悬架高度可调 (+160mm/-130mm)，带液压闭锁装置，能实现悬挂、刚性锁定、自动调平、整车升降、单点升降五种模式。具备车体姿态实时监控、轴荷智能识别、主动提升和复杂路面上适应等功能，驾乘更舒适，行驶更稳定。

Steering 转向系统

- All new constant pressure and constant flow steering system featuring linear following without lag and precise steering angle. Three steering emergency systems available. The steering mode is adjusted according to the speed. Starting from 30km/h, axle 3 and 4 stop steering, and by 60km/h, axle 5 and 6 stop steering.
- Six steering modes: 1) on-road driving (default); 2) all wheel steering; 3) crab steering; 4) reduced swing out steering; 5) independent rear axle steering; 6) independent front axle steering.
- 全新的恒压恒流量智能转向系统，线性跟随无滞后，转角精准零偏差；三重转向应急系统，行驶更加安全可靠；转向策略根据速度调节，从 30km/h 开始 3、4 桥不转向，从 60km/h 开始 5,6 桥不转向；
- 可分为六种转向模式：1) 公路行驶模式(默认模式)；2) 全转向模式；3) 蟹形模式；4) 无偏摆转向模式；5) 独立后桥转向模式；6) 后桥锁定转向模式。

Tires 轮胎

- 12 radial tires - 16.00R25 (445/95 R25) as standard.
- 12 个轮胎—16.00R25 (445/95 R25)。

Wheel formula 车轮模式

- 12 × 8 × 12.

Crane Introduction

整机介绍

Carrier 下车

Outrigger 支腿

- H-type two-stage telescopic outriggers. The hydraulic system of outrigger telescoping adopts electro proportional control with wireless remote controller. The control panel can display load on outriggers, and has the function of auto leveling, featuring high precision and easy operation.
- 活动支腿采用双 H 型两级伸缩支腿，支腿伸缩液压系统采用电比例控制技术，并配置有无线遥控，支腿控制面板可显示所承受的载荷，并具有自动调平等功能，控制精度高，操作简便。

Brake 制动系统

- Dual circuit, air brake, disc brakes available.
- Service brake: air servo brakes on all wheels, dual circuits, all wheels equipped with disc brakes.
- Parking brake: actuated by pressure accumulators on axles 2 to 6.
- Assist brake: engine brake and exhaust brake, transmission hydraulic retarder brake.
- 双回路、气制动、配备盘式制动器；
- 行车制动器：所有车轮均采用空气伺服制动器，双回路制动系统，新型盘式制动器；
- 驻车制动器：由蓄压器驱动作用在第二至第六桥上；
- 辅助制动器：发动机上带有发动机制动及排气制动器、变速箱配备液力缓速制动。



Electrical system 电气系统

- 24V DC power supply with lighting system, chassis power cut-off available. The throttle and outrigger are controlled by electrical system, which makes the movements easy and fast. The electrical system has strong detection, logic and calculation capabilities, with fault self-diagnosis, centralized display and self-protection functions.
- The chassis adopts CAN-Bus system, which is fast, stable and accurate. the centralized display system is multi-functional; the protection level is as high as IP65; the power consumption is small, which is only 5W at most; four function keys are provided in the user interface; LCD screen is with adjustable contrast.
- 采用 24V 直流电源，可实现下车电源切断；配备汽车照明系统；车辆的动作，如油门、支腿操纵等都经电气控制实现，使动作轻便、快捷；电气系统有很强的检测、逻辑、运算等能力，具故障自诊断、集中显示及自我保护功能；
- 底盘采用 CAN 总线系统，具有数据快速、稳定、准确等优点；多功能的集中显示系统；防护等级高，IP65；功率消耗小，最大仅有 5w；在用户界面提供四个功能键；显示采用 LCD 液晶，对比度可调整。

Crane Introduction

整机介绍

Operator's cab 操纵室

- Press welding construction, 20° tilttable to increase visibility for load at heights. Outward-opening type door, panoramic skylight with safety glass, softened interior trim, rollable sunshade. Joystick is mounted on the control box; operator seat backrest can be tilted and repositioned; heating and cooling A/C is available. All is designed ergonomically.
- Dual touch screens of one-key operation, safeguarding lifting operation in multiple images and angles. Key areas incl. boom, luffing jib and superlift winch are monitored by surveillance camera. The console and display are combined reasonably for more convenient man-machine interaction.
- 采用冲压成型的全焊接结构，装有安全玻璃，车窗装有遮阳帘，外开式车门，操纵杆安装在操纵箱上，符合人机工程原理：防腐玻璃钢强化复合结构、全覆盖软化内饰、全景式天窗、操作手座椅靠背可倾斜定位等人性化设计，操作舒适、轻松；触模式双屏显示系统，多画面、多角度监控保证作业安全，满足一键式操作；主、塔臂及超起卷扬配备监视器，重点区域集中监视；主控台与操作显示系统有机结合，人机交互方便快捷；操纵室可向上倾斜 20°，满足高处的作业观察需要；配备冷暖空调。

Superstructure engine 上车发动机

- Model: Mercedes-Benz OM906LA.E3A/1, electronically controlled, inline six-cylinder, water-cooled, supercharged intercooled, diesel engine.
- Power: 205kW/2200rpm.
- Torque: 1100N·m/1200~1600rpm.
- Emission standard: complying with EU Stage III A.
- Fuel reservoir capacity: 330L.
- 型式：型号奔驰 OM906LA.E3A/1，电控、直列六缸、水冷却、增压中冷、柴油发动机；
- 功率：205kW/2200rpm；
- 最大扭矩：1100N.m/1200 ~ 1600rpm；
- 环保性：排放符合国 III 标准；
- 燃料箱有效容积：330L。

Boom & telescoping system 伸缩系统

- Telescopic boom: one base section plus seven telescoping sections. Bended and welded using fine grain high tensile steel. Oval cross section of torsion resistance. Single cylinder auto pinning telescoping mechanism. One double acting cylinder controls all sections for variable length combinations. Basic boom 15.7m, full extension 90m.
- Jib: standard fixed jib, heavy-duty fixed jib and luffing jib available. Standard fixed jib 36m, optional heavy-duty fixed jib 6m~48m and luffing jib 12m~78m, delivering strong lifting performance.
- Superlift device: independently arranged at left and right sides of the base boom head, self assembled and disassembled requiring no helper crane. The superlift device makes the force state of boom greatly improved, avoiding side bending and reducing deflection of long boom by 30%, and the lifting performance can be increased by up to two fold.
- 主起重臂：由 1 节基本臂和 7 节伸缩臂组成，采用细晶粒高强钢板折弯、焊接制成，采用椭圆形截面，抗屈曲性能好；采用单缸自动插销式系统，一个双作用油缸可以控制所有吊臂的伸缩，达到多种臂长组合；基本臂长 15.7m，全伸臂长 90m；
- 副起重臂：有标准副臂、重型固定副臂和塔式副臂三种：标配标准副臂 36m；选配重型固定副臂 6m~48m，塔式副臂 12m~78m，吊高吊远能力兼备；
- 超起装置：布置于基本臂头部左右两侧，左右独立，无需辅助吊装可实现自拆装；超起装置可使改善起重臂的受力状态，避免旁弯、减小下挠变形，起重臂在长臂状态下挠度可减小 30%，起重性能提升 200% 以上。

Hoist 起升系统

- Hydraulic motor driven planetary reducer and specialized groove drum, fitted with brake.
- Rigging: high quality wire rope lock is applied. Rope end cast and installed in lock sleeve, increasing reeving speed.
- Spec. φ 24-2160, anti-rotation wire rope. Max. single rope speed (the 4th layer): approx. 130m/min.
- 液压马达驱动的行星齿轮减速机和专用绳槽卷扬鼓，内置制动器；
- 钢丝绳锁具：采用高品质钢丝绳锁，钢丝绳端浇铸，直接安装于锁套内，提高了起重速率的更换速度，方便快捷；
- 钢丝绳规格：φ 24-2160，抗旋转钢丝绳；最大单绳速（第四层）：约130m/min。

Luffing system 变幅系统

- Double cylinders. Luffing angle: -0.2°~84°.
- Double-pump flow confluence open type hydraulic circuit is adopted, and combination of active and passive luffing mechanism controlled electro proportionally, can realize fast speed at large angle and stable process at smaller angle.
- 双油缸前顶式变幅，变幅角度 -0.2°~84°，液压系统采用双泵合流开式液压回路，采用电比例控制、动力落幅和自重落幅相结合，可实现大角度快速落幅，小角度稳定慢速落幅。

Slewing platform 转台结构

- Made of fine grain high-strength steel plate, the structure is optimized to facilitate stronger bearing capacity and torsion resistance.
- 三一自主设计，结构更优化。由细晶粒高强钢制成。

Control system 控制系统

- Powered by 24V DC and using IFM controller and harness wiring, the control network of CAN-BUS combined with conventional electrical system functions logic control and electro proportional control.
- System real-time monitoring and automatic fault diagnosis available.
- Hoisting, slewing and luffing are controlled by two electro proportional joysticks which can be automatically reset in multiple directions; telescoping is operated by floor-mount pedal; counterweight lifting, operator's cab tilting, slewing platform locking are all controlled by the control panel.
- The display is connected to the controller by CAN Bus, and it functions digital adjustment and display of electro proportional control parameters, display of electro proportional system fault codes, and display of real-time data of hydraulic system.
- 由 24V 直流电源供电，采用德国进口 IFM 控制器、电缆布线，CAN-BUS 总线控制网络，与常规电气相结合，完成系统的逻辑控制与电比例控制功能；
- 具有系统实时监测和故障自动诊断功能；
- 起升、回转、变幅由两个可自动复位多方向电比例手柄控制；伸缩由脚踏式伸缩踏板操纵；平衡重升降、操纵室变位、转台锁定均在操控面板按键控制；
- 显示器由 CAN 总线与控制器器联接，主要功能：电比例控制参数的数字化调整和显示，电比例系统的故障代码显示，液压系统实时检测数据的显示。

Slewing 回转系统

- Fixed displacement motor and reducer are adopted and mesh externally with the ring. 360 ° slewing. Stepless speed regulation possible. Slewing speed 0~1.2rpm. The closed type slewing system reduces energy loss as well as increases efficiency. Electro-proportional brake pedal and emergency brake available.
- 由技术成熟、并在汽车起重机上广泛使用的定量马达和回转减速机组成，同时与回转支承采用外啮合形式，以实现 360° 全回转，回转速度可从 0~1.2rpm，无级调速；回转液压系统采用闭式系统，即能够避免开式系统的节流损失，又使系统具有较高的效率；电比例制动踏板，可实现紧急制动。

Crane Introduction

整机介绍

Hydraulics 液压系统

- The superstructure hydraulics adopts open and closed type combined system, featuring load sensing, heavy load in low speed and smaller load in high speed, ensuring high efficiency. Luffing and telescoping systems are of open type formed by electro proportional pump and self-made main valve, functioning one-key pressure calibration and smart modification. Staged pressure and electro proportional pump displacement realized energy efficiency and operation safety. Hoist adopts close type to ensure responsive hook movement and wide speed range. Slewing closed system ensures non-time-delay start and stop. Counterweight lifting and lowering, operator's cab tilting and turntable lockout available.
- The pump, piston motor and balance valve come from international well-known brands of high quality and reliability. Open and closed type electro proportional pump can adjust displacement for maximized energy usage rate. Double pump confluence and shunt mode realizes pressure and flow stepless adjustment and non-interfering dual circuit control. Single motion by confluent flow and combined motions by divided flow.
- 开闭式相结合的上车液压系统，具有负载感知特性、重载低速、轻载高速、动作效率高的特点。其中变幅伸缩系统采用电控比例泵与自制主阀组成的开式系统，具有压力一键标定以及智能修正功能，不同动作采用不同的压力等级，配合电比例泵排量，从而实现节能、安全的变幅和伸缩动作；起升卷扬系统采用闭式系统，不仅起落钩动作响应敏捷，还作业效率高，调速范围宽；回转采用闭式系统，系统启停平稳无延时，动作柔顺且操控性好；除可实现上车回转、吊臂变幅、伸缩、主卷扬起落功能外，还可实现平衡重升降、操纵室旋转、转台锁止等的功能；
- 液压泵、柱塞马达及平衡阀等关键元件均采用国际一线品牌，品质好，可靠性高；开、闭式电比例泵，实时调节排量，实现高精度流量控制，最大化减少能量浪费；自主研发的双泵合流、分流主阀，实现系统压力与流量无极调节以及互不干扰的双回路控制，单动作双泵合流效率高，组合动作双泵分流操控及平顺性好。变幅采用自重与加压落幅补偿液压系统，落幅微动性、平稳性好。主臂伸缩采用单缸插销式快速伸缩系统。

Safety equipment 安全装置

- The LMI calculation system ensures load accuracy ranging $\pm 3\%$ through online empty-load calibration.
- Hydraulic system is configured with hydraulic balance valve, relief valve, two-way hydraulic lock to achieve stability and reliability.
- The main winch is equipped with third wrap indicator to prevent wire rope from over-hoist-down.
- The A2B limit switch at boom and jib heads prevents wire rope from over-hoist-up.
- Anemometer at boom head detects wind speed for operation safety.
- Suplift rope tensioning protection program, jib erection protection and load protection program available.
- 采用分析力学方法，建立了基于吊重力学模型的力矩限制器计算系统，通过在线空载标定，吊重精度达到 $\pm 3\%$ ；
- 液压系统配置液压平衡阀、溢流阀、双向液压锁等元件，实现液压系统稳定可靠；卷扬配置三圈保护器，防止钢丝绳过放；
- 臂端配置高度限位器，防止钢丝绳过卷；
- 臂端装有风速仪，检测高空风速是否超过可作业允许范围；
- 超起收放绳拉力保护程序，塔（副）臂安装、吊载保护程序等。

Counterweight 配重


- Repositioning with counterweight loaded. 20t mount tray and 8*10t standard counterweight blocks feature 3 positions and 6 combinations: 0t~100t, which can meet the needs of different working conditions and maximize the performance. Counterweight can be mounted and dismounted by remote control.
- 组合式可带载变位配重，20t 配重架及 8 块 10t 配重块，从 0t~100t 共 6 种组合方式，3 种配重重心位置，最大限度发挥结构件性能，可遥控拆卸及安装，微动性好。

Counterweight Combinations


配重组合

10t standard counterweight blocks, designed in modular concept, are interchangeable with our 350t~700t all-terrain cranes, which means lower operational cost for fleet owners.

10t 标准配重块，模块化设计，350t~700t 通用，运营成本更低。

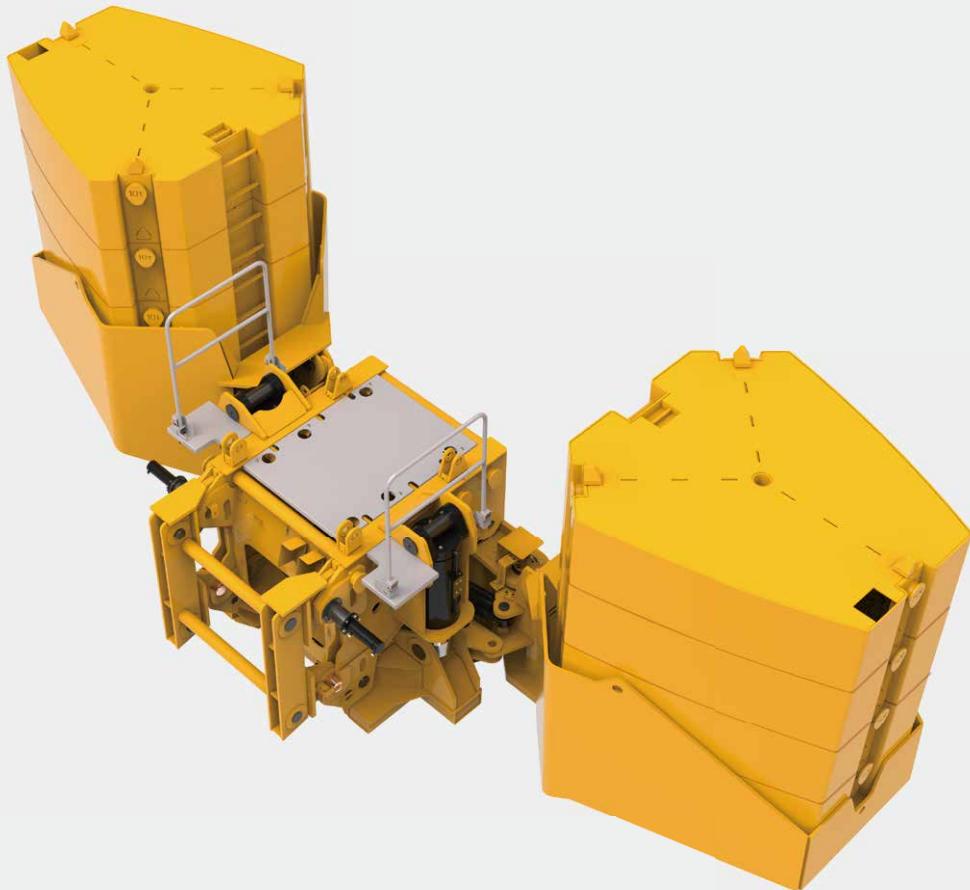

- ① CW frame & base plate 配重架及托盘 20t
② CW block 配重块 10t*8

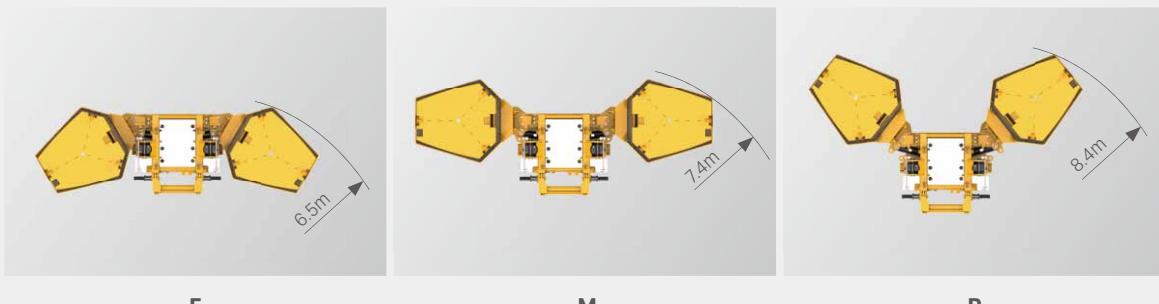

F

M

R

Jib Assembly

副臂组合


A variety of jib configuration with enhanced lifting capacities enable the crane to cope with more application scenarios.

多种副臂配置可选，性能优化，适用性更广。

Fixed Jib Assembly

(Standard, interchangeable with 300t~500t ATs)


固定副臂(标配, 300t~500t 通用)

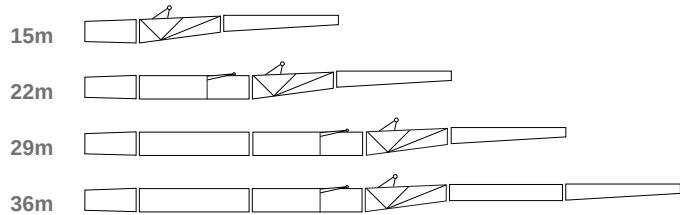

Heavy-duty Fixed Jib

(Optional, interchangeable with 300t~500t ATs)


重型副臂(选配, 300t~500t 通用)

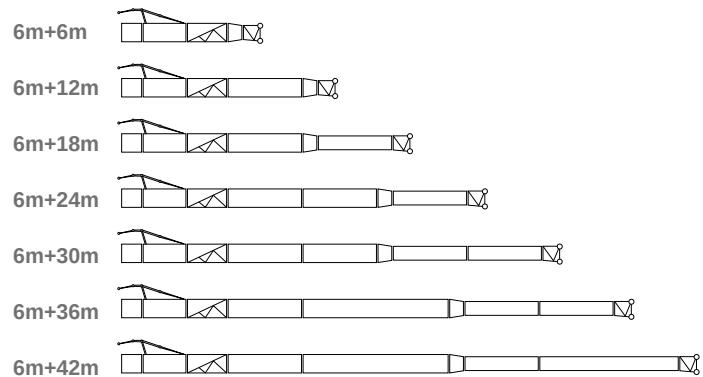

Luffing Jib

(Optional, interchangeable with 350t~500t ATs)

变幅副臂(选配, 350t~500t 通用)

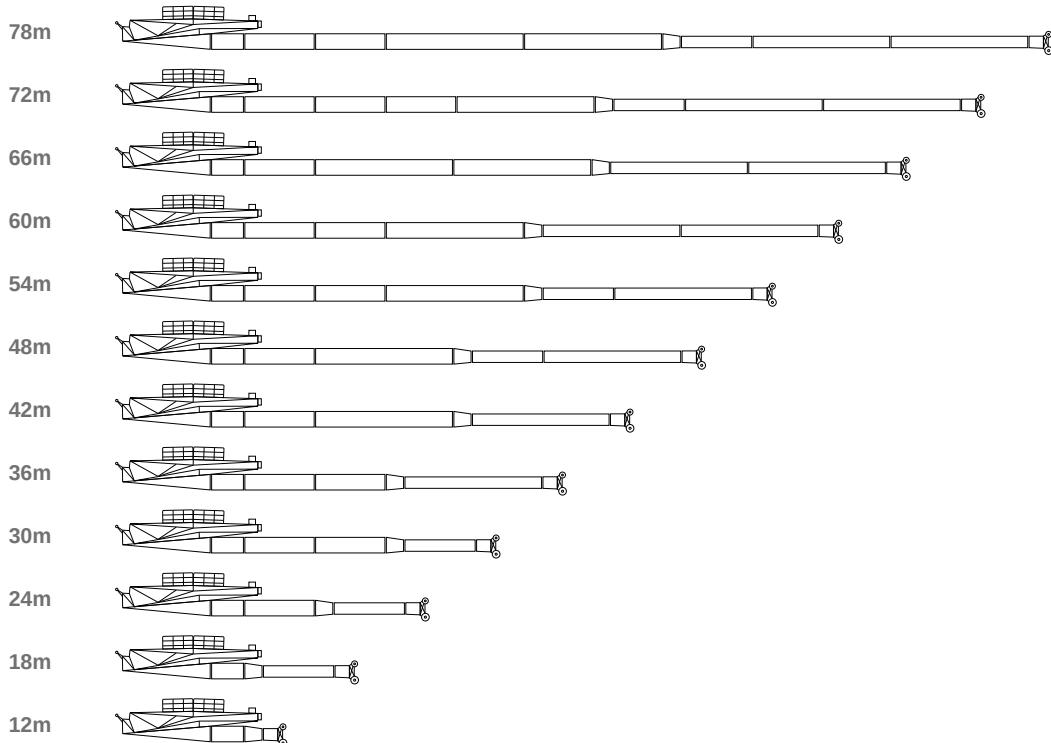

Working Conditions

工况组合



Telescopic Boom
主臂


Telescopic Boom + Superlift Device
主臂 + 超起

Telescopic Boom + Standard Fixed Jib
主臂 + 轻型副臂

Telescopic Boom + Standard Fixed Jib + Superlift Device
主臂 + 轻型副臂 + 超起

Working Conditions

工况组合

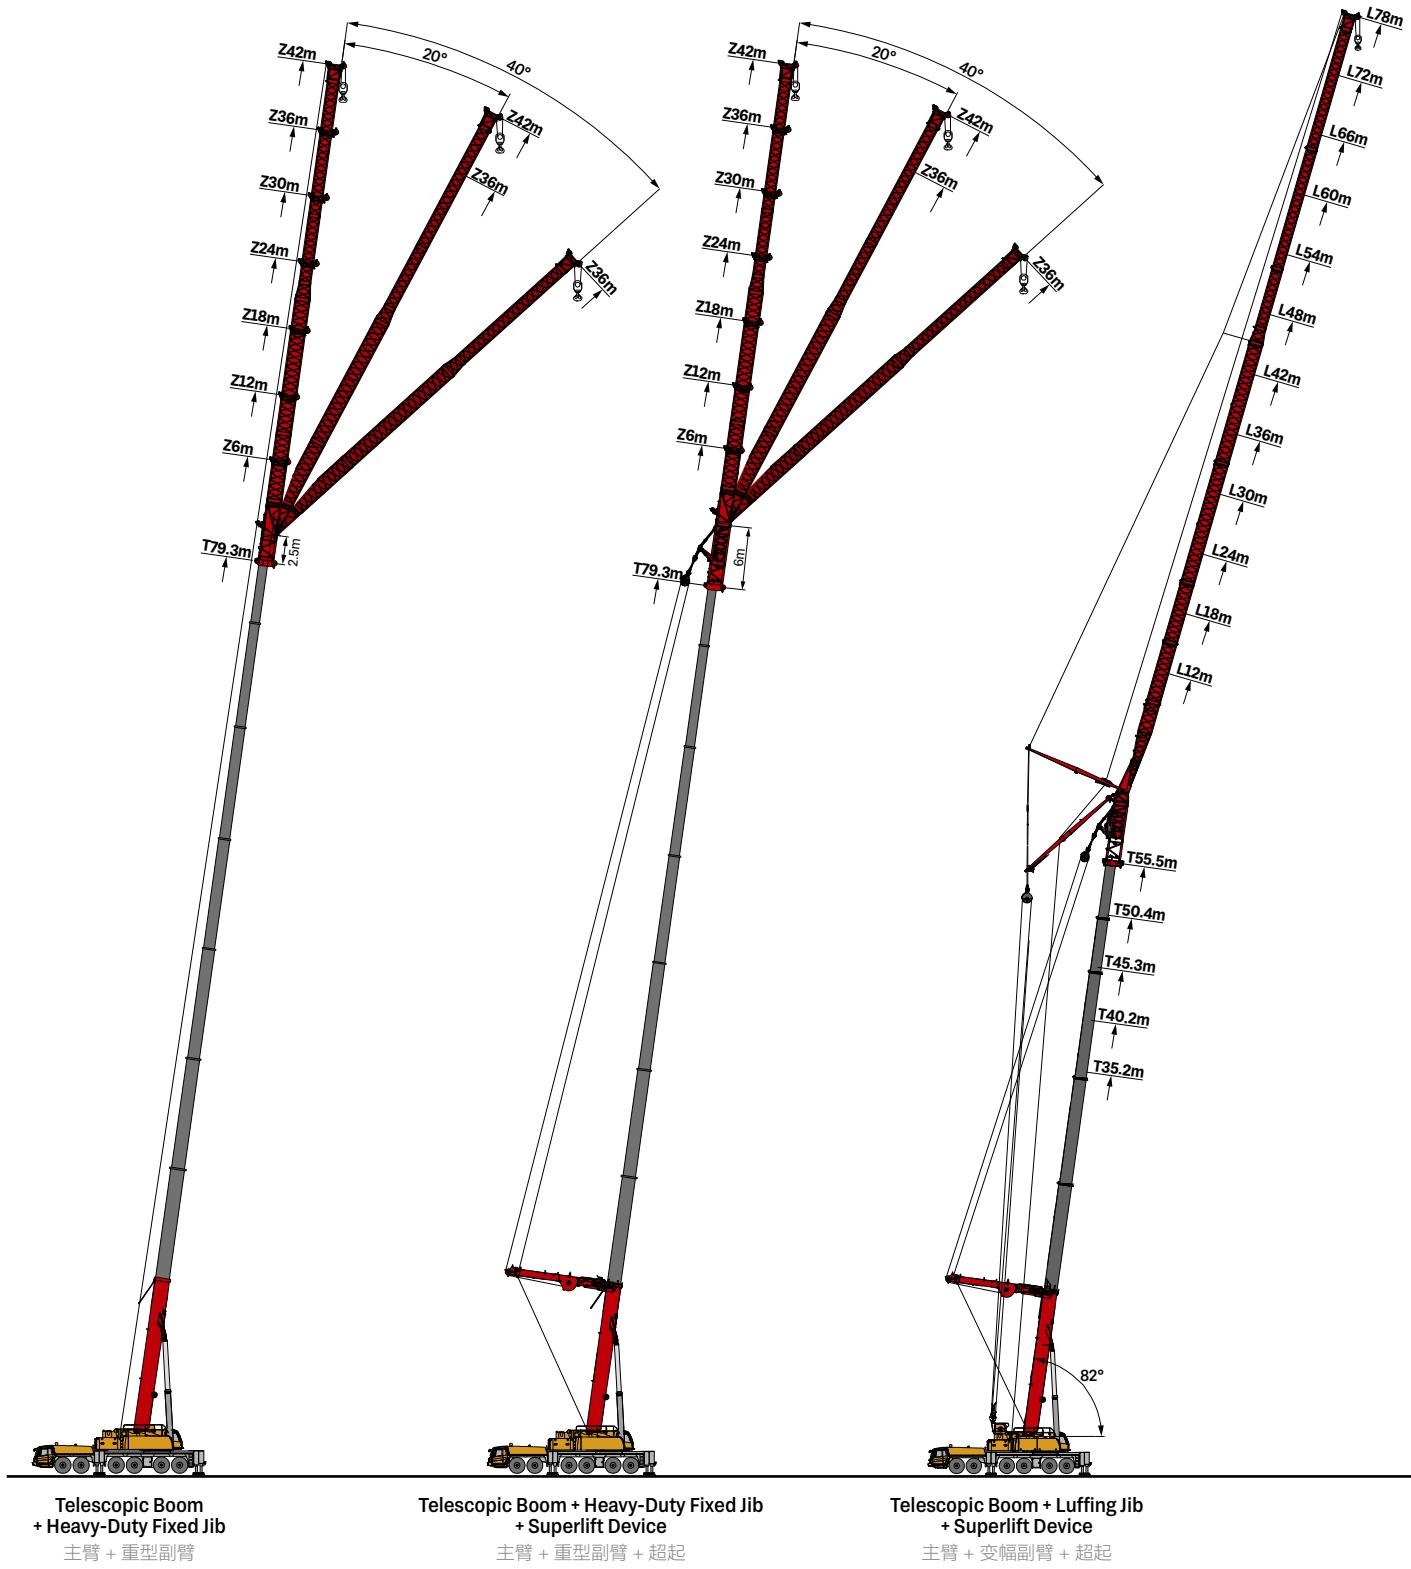


Telescopic Boom
+ Heavy-Duty Fixed Jib
主臂 + 重型副臂

Telescopic Boom + Heavy-Duty Fixed Jib
+ Superlift Device
主臂 + 重型副臂 + 超起

Telescopic Boom + Luffing Jib
+ Superlift Device
主臂 + 变幅副臂 + 超起

Operating Range - Telescopic Boom


起升高度曲线 - 主臂

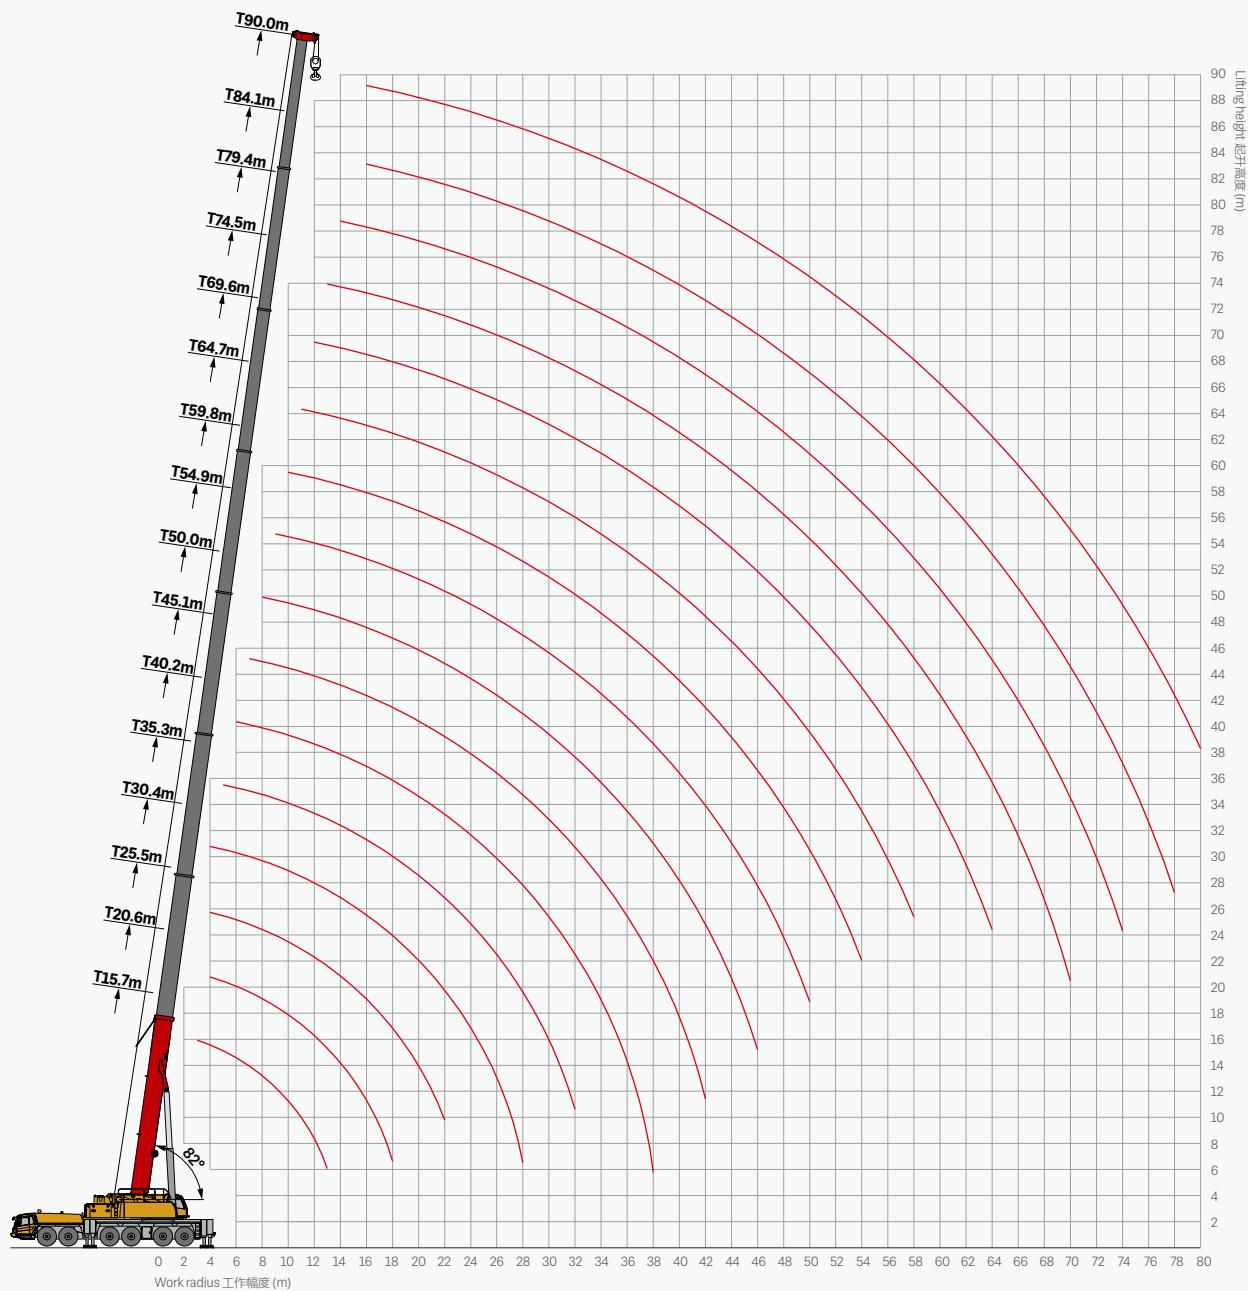

Load Chart - Telescopic Boom

性能表 - 主臂

Unit: t



m m/s	15.7m	20.6m	25.5m	30.4m	35.3m	40.2m	45.1m	50.0m	54.9m	59.8m	64.7m	69.6m	74.5m	79.4m	84.1m	90m	m m/s	
2.6	400.0*																2.6	
3	350.0*																3	
3.5	230.0*	175.0															3.5	
4	208.0*	175.0	170.0														4	
4.5	190.0	175.0	166.0	150.0													4.5	
5	175.0	165.0	163.0	148.0	130.0												5	
6	160.0	155.0	153.0	142.0	128.0	110.0											6	
7	145.0	140.0	138.0	133.0	125.0	108.0	95.0										7	
8	130.0	126.2	126.0	123.0	120.0	105.0	93.0	80.0									8	
9	120.0	116.9	117.1	113.0	110.0	103.0	90.0	77.0	67.0								9	
10	110.0	108.0	107.0	107.5	100.0	95.0	87.0	73.0	63.0	53.0							10	
11	95.0	95.0	95.0	95.0	93.0	87.0	82.0	67.0	61.0	51.0	46.0						11	
12	85.0	90.0	90.0	90.0	85.0	80.0	76.0	64.0	59.0	50.3	44.0	36.0					12	
13	75.0	84.0	83.0	80.0	78.0	73.0	71.2	61.0	55.0	48.0	43.0	35.0	29.0				13	
14		78.0	76.0	75.0	73.0	68.0	66.7	58.0	53.0	46.0	41.0	33.3	28.0	23.0			14	
16		65.0	65.0	63.0	63.0	61.0	58.4	52.5	48.5	41.0	37.0	30.7	27.0	22.5	17.0	12.5	16	
18		50.0	56.5	55.0	56.0	53.2	52.0	48.5	44.6	37.0	34.0	28.3	26.0	21.5	16.9	12.5	18	
20			49.0	49.0	50.0	47.4	46.3	44.5	40.5	34.4	31.0	26.6	25.0	20.5	16.5	12.5	20	
22			40.0	43.3	44.3	43.0	42.0	41.0	36.7	31.7	27.8	24.8	23.5	19.5	16.3	12.5	22	
24				37.7	38.6	38.9	38.1	36.0	33.8	28.8	25.6	22.7	22.0	18.5	16.0	12.3	24	
26				33.1	34.0	35.1	34.5	32.0	30.7	26.5	23.6	20.9	20.3	17.5	15.4	12.1	26	
28					30.1	31.2	31.8	30.1	28.3	24.5	21.8	19.7	18.5	16.5	14.5	11.9	28	
30						26.8	29.2	28.8	28.2	26.1	22.5	20.1	18.6	17.5	15.7	13.6	30	
32						24.0	26.9	26.1	26.4	24.0	20.8	18.5	16.7	16.2	14.6	13.0	32	
34							25.2	23.6	24.3	22.5	19.1	17.3	15.6	15.2	13.9	12.5	34	
36							23.6	21.4	22.5	20.7	18.0	16.0	14.5	14.3	13.1	12.0	36	
38								19.5	20.6	19.4	16.6	15.0	13.5	13.4	12.5	11.5	38	
40								17.8	18.8	17.8	15.2	13.8	12.7	12.3	11.7	11.0	40	
42									17.3	16.2	14.3	13.0	11.8	11.5	11.1	10.5	42	
44									15.9	14.7	13.1	11.9	11.0	10.7	10.5	9.9	44	
46									14.5	13.4	12.4	11.0	10.5	10.2	9.8	9.4	46	
48										12.2	11.6	10.3	9.3	9.5	9.1	8.8	48	
50										11.1	10.7	9.4	8.6	8.8	8.5	8.3	50	
52											9.8	8.8	8.0	8.3	7.9	7.7	6.8	52
54											8.8	8.2	7.6	7.6	7.5	7.3	6.5	54
56											8.0	7.6	7.0	7.0	6.9	6.8	6.0	56
58												6.9	6.6	6.6	6.4	6.4	5.5	58
60												6.5	6.4	5.9	6.1	5.9	5.1	60
62													5.9	5.6	5.6	5.6	4.7	62
64													5.6	5.1	5.3	5.3	4.3	64
66														4.6	4.8	4.9	4.1	66
68														4.2	4.5	4.6	3.8	68
70														3.8	4.2	4.3	3.5	70
72															3.9	4.0	3.2	72
74															3.4	3.7	2.9	74
76																3.3	2.5	76
78																2.8	2.2	78
80																	1.8	80
	30	13	13	12	10	9	8	6	5	4	4	3	3	2	2	1		
	14.5	14.5	13.0	13.0	11.3	11.3	11.3	11.3	11.3	11.3	11.3	11.3	11.3	11.3	11.3	11.3		

Remark

1. Ratings marked with * requires load over rear with additional equipment.
2. Ratings above are the rated lifting capacities when this crane is supported with the firm ground and stays in level.
3. Ratings above are the maximum capacities of varied extending modes.
4. The rated lifting capacities include the weight of hook block and riggings.
5. Choose rated lifting capacity of the longer boom and radius when the actual boom length and radius are between two values in the charts.

1. *需增加附属装置，正后方作业；

2. 表中给定数值是在平整坚固的地面上，整机调平状态下起重机的额定起重量；

3. 表中给定数值为对应臂长、取不同伸臂方式的最大值；


4. 表中额定起重量包括起重主钩和吊具的重量；

5. 如果实际幅度介于表上两个数字之间，取较大值决定作业的起重量。

Load Chart - Telescopic Boom

性能表 - 主臂

Unit: t



m m/s	15.7m	20.6m	25.5m	30.4m	35.3m	40.2m	45.1m	50.0m	54.9m	59.8m	64.7m	69.6m	74.5m	79.4m	84.1m	90m	m m/s	
2.6																	2.6	
3	175.0																3	
3.5	175.0	175.0															3.5	
4	175.0	175.0	170.0														4	
4.5	174.3	174.3	166.0	150.0													4.5	
5	164.1	164.1	160.8	148.0	130.0												5	
6	145.3	145.3	142.4	142.0	128.0	110.0											6	
7	128.7	128.7	128.7	128.7	125.0	108.0	95.0										7	
8	116.4	116.4	114.0	116.4	116.4	105.0	93.0	80.0									8	
9	106.4	107.5	105.2	105.7	106.4	103.0	90.0	77.0	67.0								9	
10	97.3	98.4	96.1	96.6	97.3	95.0	87.0	73.0	63.0	53.0							10	
11	89.5	90.6	88.3	88.8	89.5	87.0	82.0	67.0	61.0	51.0	46.0						11	
12	82.0	83.5	80.5	81.1	82.0	80.0	76.0	64.0	59.0	50.3	44.0	36.0					12	
13	74.8	76.4	73.4	74.0	74.9	73.0	71.2	61.0	55.0	48.0	43.0	35.0	29.0				13	
14		70.3	67.3	67.8	68.7	68.0	66.7	58.0	53.0	46.0	41.0	33.3	28.0	23.0			14	
16		60.1	57.1	57.9	58.6	59.6	58.4	52.5	48.5	41.0	37.0	30.7	27.0	22.5	17.0	12.5	16	
18			50.0	49.1	49.8	50.8	51.8	52.0	48.5	44.6	37.0	34.0	28.3	26.0	21.5	16.9	12.5	
20				41.3	42.0	43.0	44.2	45.2	44.5	40.5	34.4	31.0	26.6	25.0	20.5	16.5	12.5	
22					35.2	35.9	36.9	40.4	39.1	40.2	36.7	31.7	27.8	24.8	23.5	19.5	16.3	
24						31.0	32.0	36.6	34.1	35.2	33.8	28.8	25.6	22.7	22.0	18.5	16.0	
26							27.0	32.8	30.2	31.2	30.2	26.5	23.6	20.9	20.3	17.5	15.4	
28								24.6	29.4	27.8	27.7	26.7	24.5	21.8	19.7	18.5	14.5	
30									21.7	26.4	25.6	24.8	23.9	22.5	20.1	18.6	17.5	
32										19.1	23.9	23.3	22.3	21.4	20.8	18.5	16.7	
34											21.8	21.1	20.2	19.2	18.9	17.3	15.6	
36												19.9	19.2	18.3	17.2	16.9	14.5	
38													17.5	16.6	15.5	15.1	13.4	
40														16.0	15.0	13.9	13.6	
42															13.6	12.5	12.1	
44															12.3	11.2	10.9	
46															11.1	10.0	9.7	
48																9.0	8.6	8.7
50																	8.0	7.7
52																		6.8
54																		6.0
56																		5.2
58																		5.9
60																		6.6
62																		5.6
64																		6.4
66																		4.5
68																		4.2
70																		3.8
72																		3.4
74																		3.0
76																		1.8
78																		1.5
80																		1.1
	13	13	13	12	10	9	8	6	5	4	4	3	3	2	2	1		
	14.5	14.5	13.0	13.0	11.3	11.3	11.3	11.3	11.3	11.3	11.3	11.3	11.3	11.3	11.3	11.3		


Remark

1. Ratings marked with * requires load over rear with additional equipment.
2. Ratings above are the rated lifting capacities when this crane is supported with the firm ground and stays in level.
3. Ratings above are the maximum capacities of varied extending modes.
4. The rated lifting capacities include the weight of hook block and riggings.
5. Choose rated lifting capacity of the longer boom and radius when the actual boom length and radius are between two values in the charts.

- 1* 需增加附属装置，正后方作业；
2. 表中给定数值是在平整坚固的地面上，整机调平状态下起重机的额定起重量；
3. 表中给定数值为对应臂长、取不同伸臂方式的最大值；
4. 表中额定起重量包括起重主钩和吊具的重量；
5. 如果实际幅度介于表上两个数字之间，取较大值决定作业的起重量。

Operating Range - Telescopic Boom + Superlift Device


起升高度曲线 - 主臂 + 超起

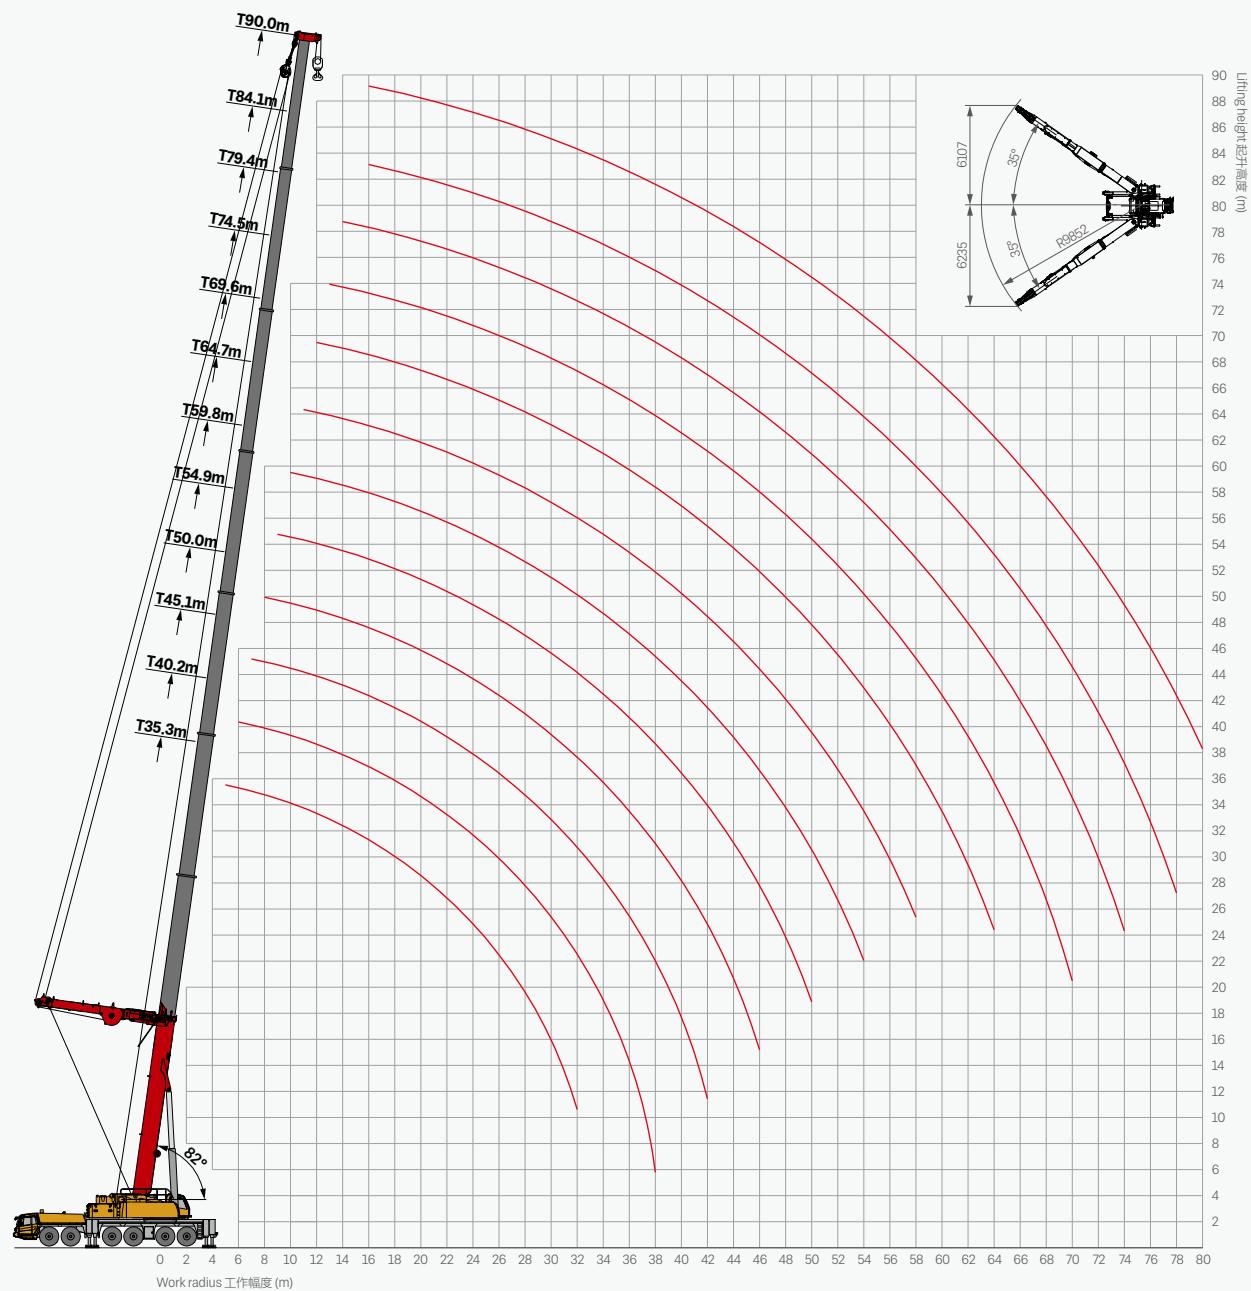

Load Chart - Telescopic Boom + Superlift Device

性能表 - 主臂 + 超起

Unit: t



m m/s	35.3m	40.2m	45.1m	50.0m	54.9m	59.8m	64.7m	69.6m	74.5m	79.4m	84.1m	90m	m m/s				
5	125.0												5				
6	125.0	115.0	105.0										6				
7	120.0	113.0	104.0	90.0									7				
8	115.0	110.0	103.0	90.0	80.0								8				
9	110.0	105.0	101.0	89.0	80.0	75.0							9				
10	102.0	99.0	95.0	88.0	80.0	75.0	70.0						10				
11	95.0	92.0	89.7	84.4	80.0	75.0	70.0	60.0					11				
12	88.0	86.0	84.0	79.8	79.3	73.0	68.0	59.0	50.0				12				
13	82.0	80.0	79.4	75.5	75.2	70.0	66.0	58.0	50.0	42.0			13				
14	77.0	75.0	77.0	71.4	71.4	67.0	63.0	57.0	50.0	42.0	35.0	26.0	14				
16	67.7	68.0	67.8	64.6	64.7	63.0	60.0	56.0	48.0	41.0	35.0	26.0	16				
18	58.5	60.2	59.8	58.6	58.7	56.0	53.0	50.0	46.0	40.0	35.0	26.0	18				
20	50.9	52.5	51.8	53.6	54.1	50.9	48.0	46.5	43.0	38.0	34.0	25.5	20				
22	44.6	46.1	47.2	48.9	48.2	46.9	43.0	42.5	40.0	35.5	32.0	25.0	22				
24	39.2	40.8	42.3	43.8	43.0	42.9	40.0	39.5	36.5	33.5	30.0	24.5	24				
26	35.0	36.4	37.8	41.8	41.1	38.6	36.6	36.0	33.5	31.6	28.0	24.0	26				
28	31.1	32.5	37.0	38.5	38.5	34.7	33.3	33.0	31.5	30.1	26.8	23.0	28				
30	26.9	28.8	30.4	35.2	35.2	33.4	31.2	31.5	29.5	28.4	25.7	21.5	30				
32	23.3	25.5	27.1	32.1	32.1	32.3	29.0	28.6	28.0	26.9	24.7	20.0	32				
34		22.4	24.3	29.2	29.2	29.4	27.9	25.7	25.5	25.4	23.5	19.0	34				
36		19.7	22.1	26.7	26.7	26.9	26.6	24.1	23.8	24.2	22.0	18.0	36				
38			21.2	24.4	24.5	24.6	24.4	22.7	22.2	22.2	20.8	17.0	38				
40				20.6	22.4	22.5	22.6	22.4	22.0	21.4	20.2	16.0	40				
42					20.6	20.7	20.8	20.6	20.5	20.0	19.1	17.5	42				
44						19.0	19.0	19.0	18.9	18.4	18.0	16.6	44				
46						17.5	17.6	17.8	17.5	17.4	16.9	15.9	46				
48							16.1	16.3	16.1	16.0	15.5	15.1	48				
50								14.8	15.0	14.8	14.7	14.2	13.4	50			
52									13.8	13.6	13.5	13.0	12.8	11.7	52		
54									12.7	12.5	12.4	11.9	11.8	11.3	54		
56									6.9	11.4	11.3	10.9	10.9	10.3	56		
58										10.5	10.4	9.9	10.0	9.5	58		
60										9.6	9.5	9.0	9.2	8.7	60		
62											8.7	8.2	8.5	7.9	8.1	62	
64											7.9	7.4	7.7	7.2	7.4	64	
66												6.7	7.1	6.6	6.7	66	
68												6.0	6.5	6.0	6.1	68	
70													5.4	5.9	5.4	5.6	70
72														5.4	4.9	5.1	72
74														4.9	4.4	4.6	74
76															4.0	4.1	76
78															3.5	3.8	78
80																3.6	80
82																3.0	82
T	10	9	8	7	6	6	6	5	4	4	3	2	T				
S	11.3	11.3	11.3	11.3	11.3	11.3	11.3	11.3	11.3	11.3	11.3	11.3	S				
m/s													m/s				


Remark

1. Ratings above are the rated lifting capacities when this crane is supported with the firm ground and stays in level.
2. Ratings above are the maximum capacities of varied extending modes.
3. The rated lifting capacities include the weight of hook block and riggings.
4. Choose rated lifting capacity of the longer boom and radius when the actual boom length and radius are between two values in the charts.

1. 表中给定数值是在平整坚固的地面上，整机调平状态下起重机的额定起重量；
2. 表中给定数值为对应臂长、取不同伸臂方式的最大值；
3. 表中额定起重量包括起重主钩和吊具的重量；
4. 如实际幅度介于表上两个数字之间，取较大值决定作业的起重量。

Load Chart - Telescopic Boom + Superlift Device

性能表 - 主臂 + 超起



Unit: t


m m/s	35.3m	40.2m	45.1m	50.0m	54.9m	59.8m	64.7m	69.6m	74.5m	79.4m	84.1m	90m	m m/s								
5	125.0												5								
6	125.0	115.0	105.0										6								
7	120.0	113.0	104.0	90.0									7								
8	114.0	110.0	103.0	90.0	80.0								8								
9	104.5	105.0	101.0	89.0	80.0	75.0							9								
10	95.3	96.4	95.0	88.0	80.0	75.0	70.0						10								
11	87.2	88.5	89.5	84.4	80.0	75.0	70.0	60.0					11								
12	80.2	81.4	82.6	79.8	79.3	73.0	68.0	59.0	50.0				12								
13	74.1	75.3	76.5	75.5	75.2	70.0	66.0	58.0	50.0	42.0			13								
14	68.6	69.9	71.1	71.4	71.4	67.0	63.0	57.0	50.0	42.0	35.0	26.0	14								
16	58.4	59.9	61.3	62.6	62.1	62.0	60.0	56.0	48.0	41.0	35.0	26.0	16								
18	51.2	51.5	52.9	54.2	53.6	53.6	53.0	50.0	46.0	40.0	35.0	26.0	18								
20	46.4	44.7	46.1	48.4	47.3	46.8	47.0	46.5	43.0	38.0	34.0	25.5	20								
22	42.0	39.0	40.5	45.1	45.1	41.3	41.3	41.7	40.0	35.5	32.0	25.0	22								
24	38.3	34.7	35.8	40.3	40.3	37.6	36.7	37.1	36.5	33.5	30.0	24.5	24								
26	34.3	31.7	31.8	36.4	36.4	36.2	32.7	33.1	33.5	31.6	28.0	24.0	26								
28	30.8	29.2	32.5	32.9	32.9	33.1	31.4	30.0	30.1	30.1	26.8	23.0	28								
30	26.9	26.9	25.3	29.8	29.8	29.9	29.6	27.2	26.7	27.4	25.7	21.5	30								
32	22.6	24.3	24.1	26.8	26.8	27.0	26.7	25.4	25.3	24.5	24.7	20.0	32								
34	21.6	23.0	24.3	24.3	24.5	24.2	24.2	23.6	23.1	22.6	19.0	34									
36		18.1	21.5	22.1	22.1	22.2	22.0	21.8	21.4	21.0	20.4	18.0	36								
38			19.5	20.1	20.1	20.3	20.0	19.9	19.4	19.1	18.4	17.0	38								
40				17.7	18.3	18.3	18.5	18.2	18.1	17.6	17.2	16.5	40								
42					16.7	16.7	16.9	16.6	16.5	16.0	15.6	14.9	42								
44						15.1	15.2	15.4	15.1	15.0	14.5	14.1	13.4	44							
46						13.7	13.8	14.0	13.7	13.6	13.1	12.7	12.0	46							
48							12.5	12.7	12.5	12.3	11.8	11.5	10.8	48							
50								11.3	11.6	11.3	11.2	10.7	10.3	9.8	50						
52									10.5	10.3	10.2	9.7	9.3	8.8	52						
54										9.5	9.3	9.2	8.7	8.3	7.8	54					
56										3.9	8.4	8.3	7.8	7.4	7.0	56					
58											7.5	7.4	7.0	6.6	6.0	5.8	58				
60												6.7	6.7	6.2	5.8	5.2	5.4	60			
62													5.9	5.5	5.1	4.5	4.7	62			
64														5.2	4.8	4.4	3.8	4.0	64		
66															4.2	3.8	3.2	3.4	66		
68																3.6	3.2	2.6	2.8	68	
70																	3.0	2.7	2.0	2.2	70
72																		2.1	1.5	1.7	72
74																			1.2	74	
76																				76	
78																				78	
80																				80	
82																				82	
T	10	9	8	7	6	6	6	5	4	4	3	2	T								
C_n	11.3	11.3	11.3	11.3	11.3	11.3	11.3	11.3	11.3	11.3	11.3	11.3	C_n								
C_{m/s}													C_{m/s}								

Remark

1. Ratings above are the rated lifting capacities when this crane is supported with the firm ground and stays in level.
 2. Ratings above are the maximum capacities of varied extending modes.
 3. The rated lifting capacities include the weight of hook block and riggings.
 4. Choose rated lifting capacity of the longer boom and radius when the actual boom length and radius are between two values in the charts.
1. 表中给定数值是在平整坚固的地面上，整机调平状态下起重机的额定起重量；
 2. 表中给定数值为对应臂长、取不同伸臂方式的最大值；
 3. 表中额定起重量包括起重主钩和吊具的重量；
 4. 如果实际幅度介于表上两个数字之间，取较大值决定作业的起重量。


Operating Range - Telescopic Boom + Standard Fixed Jib

起升高度曲线 - 主臂 + 轻型副臂

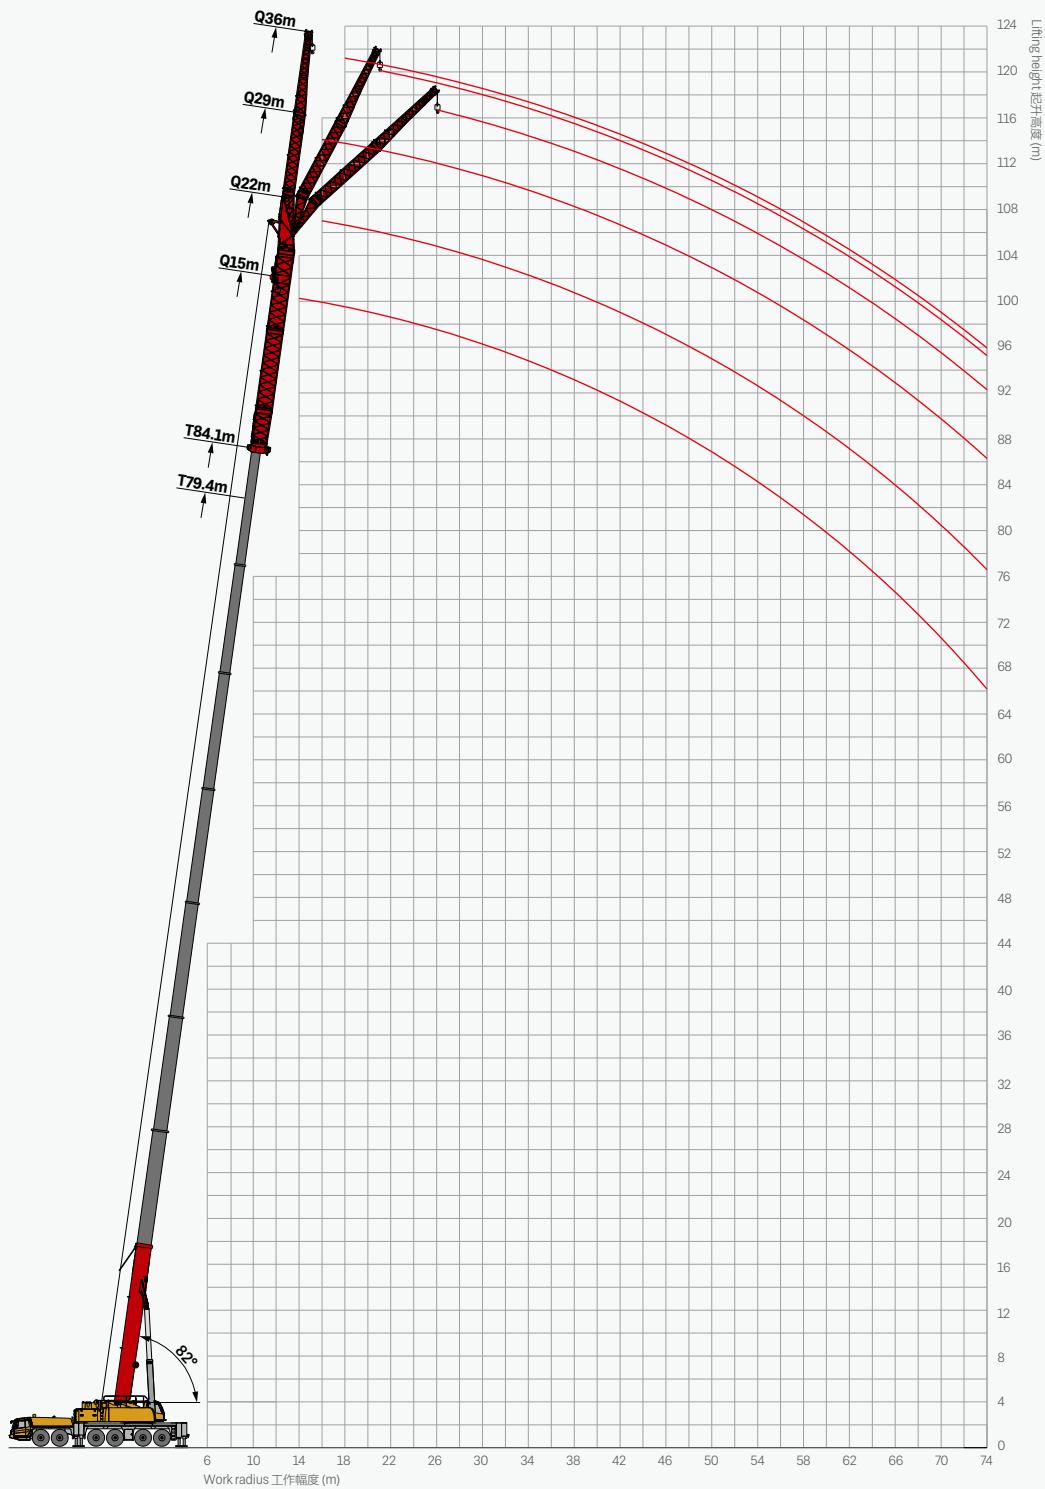

Load Chart - Telescopic Boom + Standard Fixed Jib

性能表 - 主臂 + 轻型副臂



Unit: t

	79.3m				84.1m				
	15m	22m	29m	36m	15m	22m	29m	36m	
16									16
18	8.9	6.7							18
20	8.9	6.7	5.0		6.0				20
22	8.7	6.7	5.0	4.4	6.0	5.8	4.4		22
24	8.7	6.7	4.9	4.4	6.0	5.8	4.4	3.5	24
26	8.5	6.5	4.9	4.4	6.0	5.8	4.4	3.5	26
28	8.3	6.2	4.9	4.4	6.0	5.6	4.4	3.5	28
30	8.1	5.9	4.8	4.3	6.0	5.6	4.3	3.5	30
32	7.9	5.7	4.7	4.2	6.0	5.4	4.2	3.5	32
34	7.6	5.5	4.6	4.0	6.0	5.4	4.0	3.5	34
36	7.3	5.3	4.5	3.9	6.0	5.3	3.9	3.5	36
38	7.0	4.9	4.4	3.8	5.7	5.1	3.8	3.4	38
40	6.7	4.8	4.3	3.7	5.7	4.9	3.7	3.4	40
42	6.4	4.6	4.2	3.5	5.5	4.7	3.5	3.4	42
44	6.2	4.3	4.1	3.4	5.3	4.5	3.4	3.3	44
46	5.9	4.3	4.0	3.1	5.1	4.3	3.1	3.2	46
48	5.7	4.1	3.9	2.9	4.9	4.2	2.9	3.1	48
50	5.4	3.9	3.7	2.8	4.7	4.0	2.8	3.0	50
52	5.2	3.8	3.6	2.7	4.5	3.8	2.7	2.9	52
54	5.0	3.6	3.4	2.6	4.3	3.7	2.6	2.8	54
56	4.8	3.4	3.2	2.5	4.1	3.5	2.5	2.7	56
58	4.5	3.4	3.0	2.4	3.9	3.3	2.4	2.6	58
60	4.3	3.2	2.9	2.3	3.7	3.3	2.3	2.5	60
62	4.1	3.1	2.8	2.1	3.5	3.2	2.1	2.4	62
64	3.8	3.0	2.7	2.1	3.3	3.0	2.1	2.3	64
66	3.5	2.9	2.6	2.0	3.1	2.9	2.0	2.2	66
68	3.1	2.8	2.4	1.9	2.9	2.8	1.9	2.1	68
70	2.9	2.7	2.2	1.8	2.7	2.7	1.8	2.0	70
72	2.6	2.5	2.0	1.6	2.5	2.6	1.6	1.9	72
74	2.2	2.3	1.8	1.4	2.3	2.5	1.4	1.8	74
76	1.9	2			2.1	2		2	76
78	1.7	1.8			1.9	2.1		1.6	78
80								1.5	80
82								1.4	82
84								1.3	84
	2	2	2	2	2	2	2	2	
	9	9	9	9	9	9	9	9	

Remark

1. Ratings above are the rated lifting capacities when this crane is supported with the firm ground and stays in level.
2. Choose rated lifting capacity of the longer boom and radius when the actual boom length and radius are between two values in the charts.
3. The rated lifting capacities include the weight of hook block and riggings.


1. 表中给定数值是在平整坚固的地面上，整机调平状态下起重机的额定起重量；

2. 如果实际幅度介于表上两个数字之间，取较大值决定作业的起重量；

3. 表中额定起重量包括起重主钩和吊具的重量。


Operating Range - Telescopic Boom + Standard Fixed Jib + Superlift Device

起升高度曲线 - 主臂 + 轻型副臂 + 超起

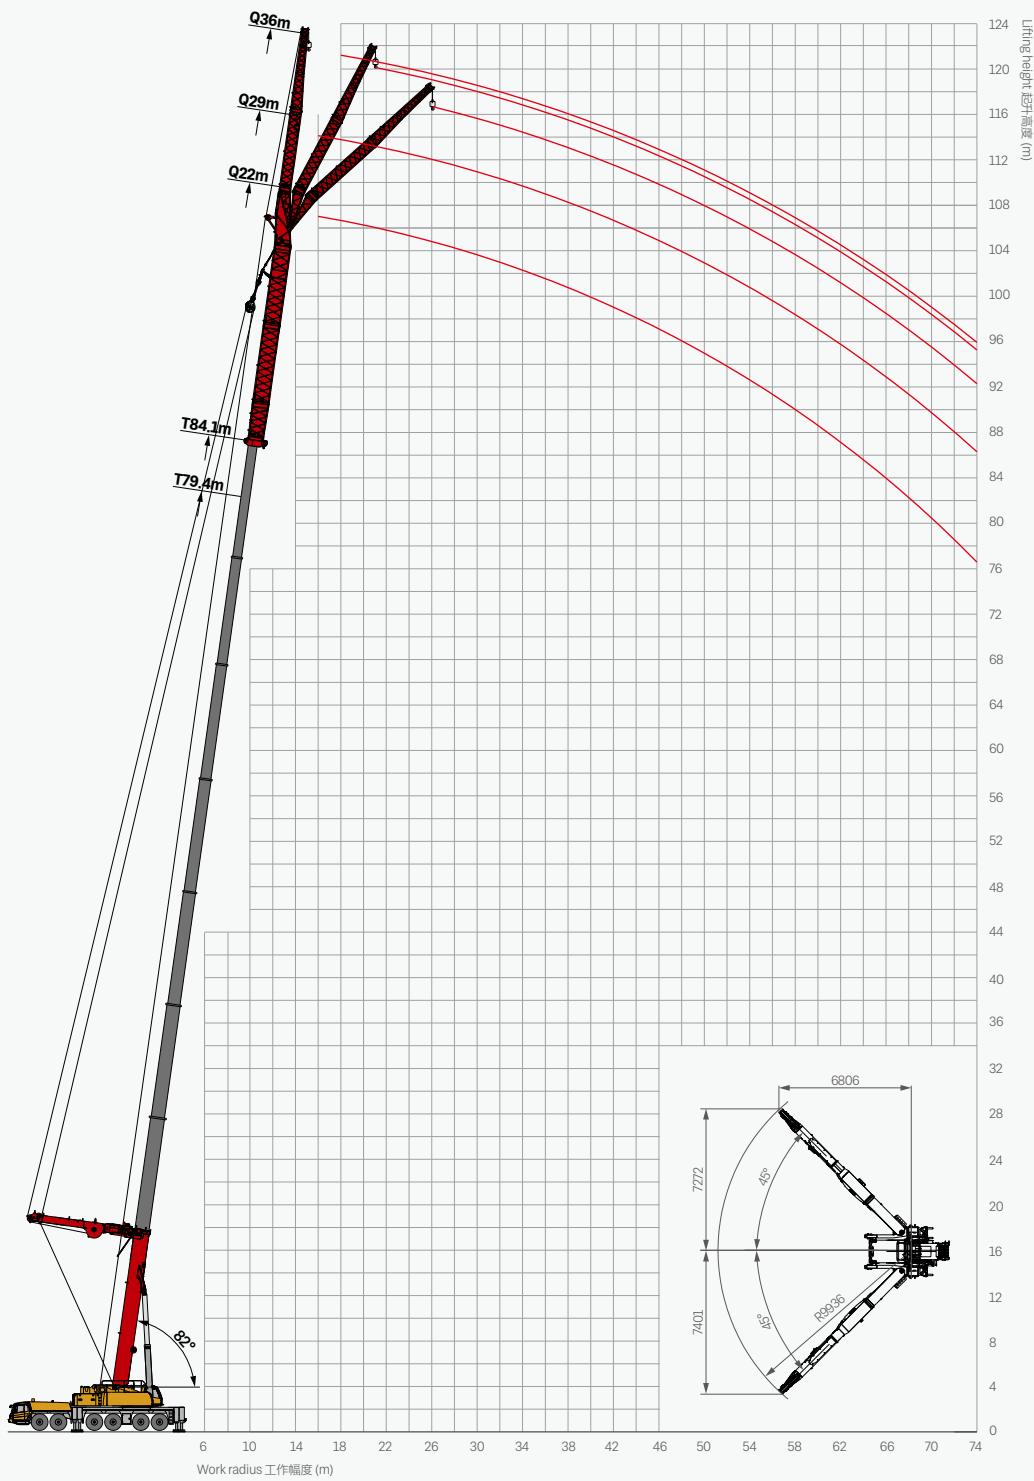

Load Chart - Telescopic Boom + Standard Fixed Jib + Superlift Device

性能表 - 主臂 + 轻型副臂 + 超起



Unit: t

	79.3m			84.1m			
	22m	29m	36m	15m	29m	36m	
16	15.6			13.5			16
18	14.4	11.5		12.5	10.0		18
20	12.7	11.2		11.0	9.7		20
22	12.1	11.0	7.6	10.5	9.5	6.6	22
24	11.5	10.5	7.6	10.0	9.1	6.6	24
26	11.0	10.3	7.3	9.5	8.9	6.3	26
28	10.5	10.0	6.9	9.1	8.7	6.0	28
30	10.2	9.7	6.6	8.8	8.4	5.7	30
32	9.8	9.4	6.4	8.5	8.1	5.5	32
34	9.5	9.0	6.1	8.2	7.8	5.3	34
36	9.2	8.7	5.9	8.0	7.5	5.1	36
38	9.0	8.4	5.8	7.8	7.3	5.0	38
40	8.8	7.9	5.5	7.6	6.8	4.8	40
42	8.2	7.0	5.4	7.1	6.1	4.7	42
44	7.5	6.4	5.1	6.5	5.5	4.4	44
46	6.8	5.8	4.6	5.9	5.0	4.0	46
48	6.1	5.2	4.3	5.3	4.5	3.7	48
50	5.4	4.6	3.9	4.7	4.0	3.4	50
52	4.7	4.3	3.7	4.1	3.7	3.2	52
54	4.0	3.9	3.5	3.5	3.4	3.0	54
56	3.5	3.5	3.4	3.0	3.0	2.9	56
58	2.9	3.1	3.1	2.5	2.7	2.7	58
60	2.5	2.9	2.9	2.2	2.5	2.5	60
62	2.4	2.5	2.8	2.1	2.2	2.4	62
64	2.2	2.3	2.7	1.9	2.0	2.3	64
66	2.0	2.2	2.5	1.7	1.9	2.2	66
	2	2	2	2	2	2	
	9	9	9	9	9	9	


Remark

- Ratings above are the rated lifting capacities when this crane is supported with the firm ground and stays in level.
- Choose rated lifting capacity of the longer boom and radius when the actual boom length and radius are between two values in the charts.
- The rated lifting capacities include the weight of hook block and riggings.

- 表中给定数值是在平整坚固的地面上，整机调平状态下起重机的额定起重重量；
- 如果实际幅度介于表上两个数字之间，取较大值决定作业的起重重量；
- 表中额定起重重量包括起重主钩和吊具的重量。

Operating Range - Telescopic Boom + Heavy-Duty Fixed Jib


起升高度曲线 - 主臂 + 重型副臂

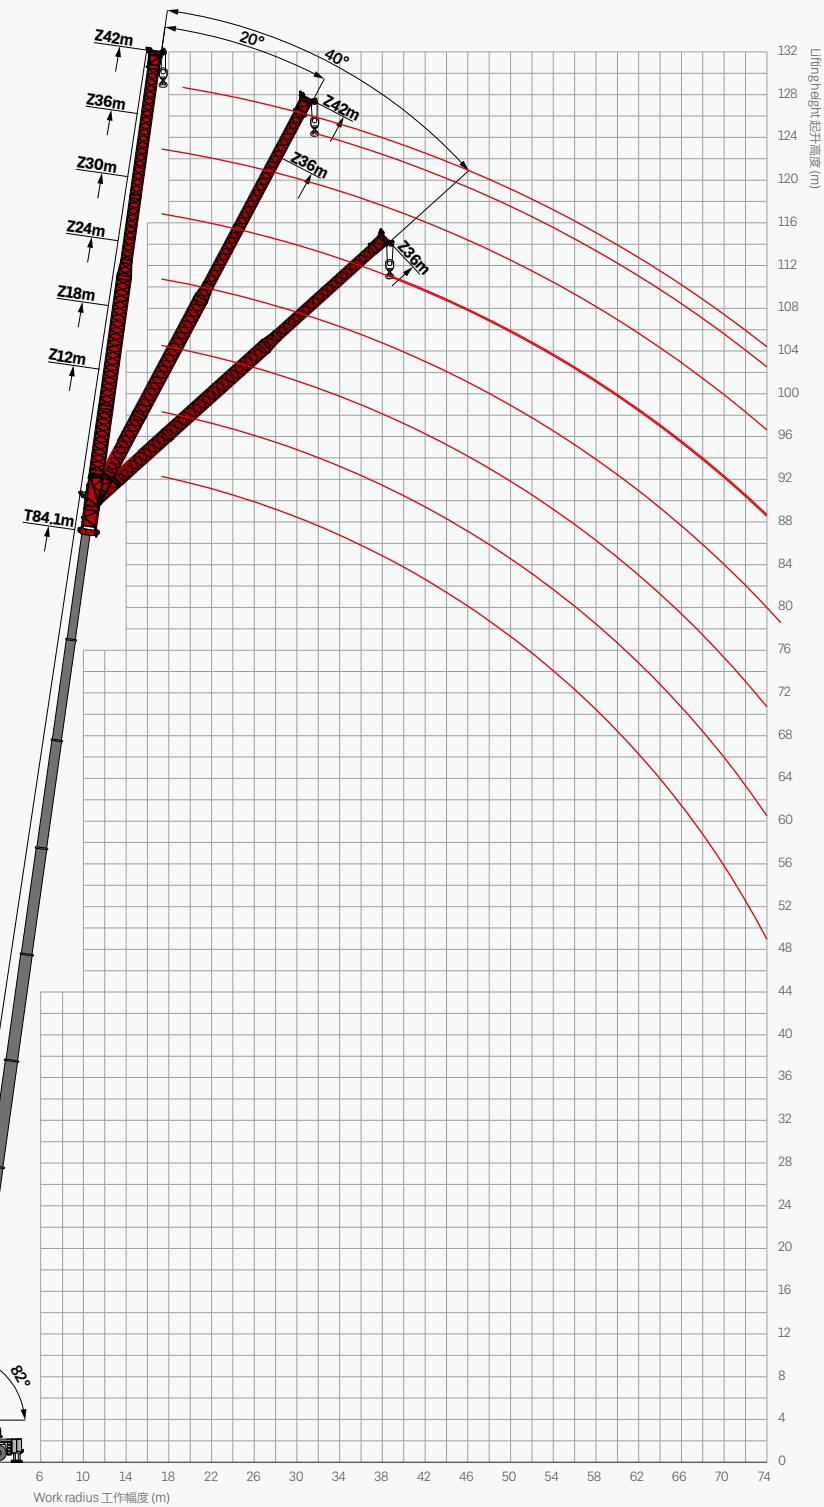

Remark: When 42m jib is mounted, the designed longest main boom length is 79.3m; when ≤36m jib is mounted, the designed longest main boom length is 84.1m.
备注: 安装 42m 副臂时，主臂最长可伸至 79.3m；安装 36m 及以下副臂时，主臂最长可伸至 84.1m。

Load Chart - Telescopic Boom + Heavy-Duty Fixed Jib

性能表 - 主臂 + 重型副臂



Unit: t

	49.9m							54.8m							
	6m	12m	18m	24m	30m	36m	42m	6m	12m	18m	24m	30m	36m	42m	
12	39.9														12
13	38.2														13
14	35.6	30.4						34.7							14
16	33.6	27.6	23.8					32.6	25.0						16
18	31.0	25.7	22.0	16.2	11.4	8.8		29.8	23.0	20.5					18
20	28.4	23.8	20.5	15.7	10.3	8.4	7.5	27.5	22.0	19.5	15.5	10.4	7.9		20
22	26.1	21.9	18.7	15.0	9.6	7.9	7.0	25.3	21.0	18.0	14.5	9.9	7.5	6.4	22
24	24.2	20.0	17.4	14.1	9.0	7.5	6.5	23.5	19.0	17.0	13.5	9.3	7.2	6.1	24
26	22.4	18.1	16.2	12.9	8.6	7.0	6.0	21.9	17.5	16.0	12.5	8.8	6.9	5.8	26
28	20.9	17.1	15.1	12.1	8.0	6.7	5.7	20.5	16.5	15.0	12.0	8.4	6.6	5.5	28
30	19.5	16.2	14.1	11.4	7.5	6.3	5.4	19.9	15.5	14.0	11.5	7.9	6.3	5.3	30
32	18.1	15.2	13.1	10.6	7.0	5.9	5.1	18.5	14.5	13.0	10.5	7.5	6.0	5.0	32
34	16.2	14.3	12.3	10.0	6.7	5.6	4.8	17.3	13.5	12.0	10.0	7.1	5.8	4.8	34
36	14.6	13.3	11.5	9.3	6.4	5.2	4.5	16.2	12.5	11.5	9.5	6.7	5.5	4.5	36
38	13.2	12.4	10.8	8.7	6.0	4.9	4.3	15.1	11.5	10.7	9.1	6.3	5.2	4.3	38
40	12.1	11.4	10.2	8.3	5.7	4.8	4.0	14.1	11.0	10.0	8.6	6.0	5.0	4.1	40
42	10.9	10.5	9.6	7.7	5.4	4.5	3.8	12.8	10.0	9.4	8.0	5.7	4.7	3.8	42
44	9.9	9.5	9.1	7.3	5.2	4.2	3.6	11.6	9.5	8.8	7.5	5.4	4.4	3.6	44
46	8.9	8.6	8.6	6.9	4.9	4.0	3.4	10.6	9.2	8.3	7.0	5.1	4.2	3.4	46
48	8.2	7.9	8.1	6.6	4.8	3.8	3.3	9.6	8.3	7.7	6.6	4.9	4.0	3.3	48
50	7.3	7.1	7.3	6.2	4.5	3.6	3.1	8.8	7.6	7.3	6.2	4.6	3.8	3.1	50
52	6.7	6.4	6.7	5.9	4.3	3.4	3.0	7.9	6.8	6.8	5.6	4.4	3.5	2.9	52
54		5.7	6.0	5.6	4.1	3.3	2.8	7.1	6.1	6.0	5.3	4.2	3.3	2.8	54
56		5.2	5.4	5.2	3.9	3.1	2.7	6.2	5.5	5.5	5.0	4.0	3.1	2.7	56
58		4.6	4.9	4.6	3.6	3.0	2.6	5.4	4.9	5.0	4.7	3.8	2.9	2.5	58
60		4.1	4.5	4.0	3.3	2.9	2.5		4.4	4.5	4.2	3.6	2.6	2.4	60
62			3.9	3.5	3.0	2.8	2.4		3.8	4.0	3.5	3.4	2.4	2.3	62
64				3.1	2.9	2.6	2.2			3.5	3.1	3.2	2.1	2.2	64
66				2.9	2.6	2.4	2.1			3.1	2.7	3.0	1.9	2.1	66
68				2.6	2.4	2.2	2.0				2.4	2.8	1.7	2.0	68
70					2.0	1.9					2.1	2.6	1.5	1.9	70
72						1.7						2.5		1.8	72
74						1.6						2.3		1.7	74
76						1.4								1.6	76
78						1.2								1.4	78
80														1.2	80
	3	3	2	2	1	1	1	3	2	2	2	1	1	1	
	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	

Remark


1. Ratings above are the rated lifting capacities when this crane is supported with the firm ground and stays in level.
2. Choose rated lifting capacity of the longer boom and radius when the actual boom length and radius are between two values in the charts.
3. The rated lifting capacities include the weight of hook block and riggings.

1. 表中给定数值是在平整坚固的地面上，整机调平状态下起重机的额定起重量；
2. 如果实际幅度介于表上两个数字之间，取较大值决定作业的起重量；
3. 表中额定起重量包括起重主钩和吊具的重量。

Load Chart - Telescopic Boom + Heavy-Duty Fixed Jib

性能表 - 主臂 + 重型副臂

Unit: t



	59.7m							64.6m							
	6m	12m	18m	24m	30m	36m	42m	6m	12m	18m	24m	30m	36m	42m	
12															12
13															13
14															14
16	27.0	21.0						22.0							16
18	26.0	20.0	16.5					20.6	16.0	13.0					18
20	23.9	19.5	15.5	12.5	9.8			19.3	15.0	12.0	11.0				20
22	22.2	18.5	15.0	12.0	9.4	6.9		18.1	14.0	11.0	10.0	8.0	5.9		22
24	20.6	17.5	13.5	11.5	8.9	6.8	5.7	16.9	13.0	10.0	9.0	7.5	5.8	5.3	24
26	19.2	16.0	13.0	11.0	8.5	6.7	5.5	16.0	12.5	9.6	8.4	7.0	5.7	5.2	26
28	17.9	15.0	12.5	10.2	8.1	6.6	5.3	15.1	12.0	9.0	7.9	6.5	5.6	5.1	28
30	16.8	14.0	12.0	9.7	7.7	6.5	5.0	14.1	11.0	8.5	7.5	6.0	5.5	5.0	30
32	15.7	13.0	11.0	9.1	7.4	6.4	4.8	13.2	10.5	8.1	7.1	5.6	5.4	4.9	32
34	14.7	12.0	10.4	8.6	7.0	6.2	4.6	12.3	10.0	7.7	6.7	5.3	5.2	4.8	34
36	13.7	11.0	9.8	8.1	6.7	6.0	4.4	11.5	9.5	7.4	6.3	4.9	5.0	4.5	36
38	12.8	10.5	9.3	7.7	6.3	5.8	4.2	10.8	9.0	7.0	6.0	4.7	4.9	4.3	38
40	12.0	10.0	8.7	7.3	6.0	5.6	4.0	10.2	8.5	6.7	5.7	4.4	4.7	4.1	40
42	11.3	9.3	8.1	6.9	5.7	5.4	3.8	9.5	8.1	6.4	5.4	4.2	4.5	3.9	42
44	10.6	8.7	7.6	6.6	5.5	5.2	3.6	9.0	7.5	6.1	5.1	4.0	4.3	3.7	44
46	10.0	8.1	7.1	6.2	5.2	4.9	3.4	8.4	7.1	5.8	4.9	3.8	4.1	3.5	46
48	9.1	7.7	6.7	6.0	5.0	4.7	3.3	7.9	6.6	5.4	4.6	3.6	3.9	3.3	48
50	8.3	7.1	6.3	5.2	4.7	4.5	3.1	7.5	6.2	5.1	4.1	3.4	3.7	3.1	50
52	7.6	6.7	5.7	4.9	4.5	4.3	3.0	7.1	5.8	4.8	4.0	3.3	3.5	2.9	52
54	6.6	6.4	5.4	4.6	4.3	4.1	2.8	6.5	5.4	4.5	3.8	3.1	3.3	2.7	54
56	5.7	5.7	5.0	4.2	4.1	3.9	2.7	5.6	5.0	4.1	3.6	2.9	3.1	2.6	56
58	4.9	5.1	4.7	4.0	3.8	3.7	2.6	4.8	4.8	3.7	3.4	2.6	2.9	2.5	58
60	4.1	4.6	4.3	3.4	3.5	3.5	2.5	4.0	4.4	3.5	3.0	2.4	2.7	2.3	60
62	3.4	4.1	3.7	3.1	3.2	3.3	2.4	3.3	4.0	3.3	2.8	2.2	2.5	2.1	62
64		3.6	3.3	2.9	3.0	3.1	2.2	2.6	3.6	3.0	2.6	2.0	2.3	1.9	64
66			3.2	2.9	2.7	2.9	2.1	2.0	3.2	2.8	2.4	1.9	2.1	1.7	66
68				2.6	2.5	2.5	2.7	2.0	2.8	2.5	2.2	1.7	1.9	1.5	68
70				2.3	2.2	2.3	2.5	1.9			2.0	1.6	1.7	1.3	70
72					1.7	2.1	2.2	1.7			1.7	1.4	1.4		72
74					1.5	1.8	1.9	1.6			1.5	1.2			74
76						1.6	1.6	1.4			1.2				76
78						1.4	1.3	1.2							78
80															80
	2	2	2	1	1	1	1	2	2	1	1	1	1	1	
	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	


Remark

1. Ratings above are the rated lifting capacities when this crane is supported with the firm ground and stays in level.
2. Choose rated lifting capacity of the longer boom and radius when the actual boom length and radius are between two values in the charts.
3. The rated lifting capacities include the weight of hook block and riggings.

1. 表中给定数值是在平整坚固的地面上，整机调平状态下起重机的额定起重量；
2. 如实际幅度介于表上两个数字之间，取较大值决定作业的起重量；
3. 表中额定起重量包括起重主钩和吊具的重量。

Load Chart - Telescopic Boom + Heavy-Duty Fixed Jib

性能表 - 主臂 + 重型副臂



Unit: t

	69.5m							74.4m							
	6m	12m	18m	24m	30m	36m	42m	6m	12m	18m	24m	30m	36m	42m	
12															12
13															13
14															14
16	16.0														16
18	15.9	14.1						14.2							18
20	15.7	13.8	11.5	9.0				13.8	12.0	9.0	7.1				20
22	15.5	13.2	11.0	8.5	7.0	4.8		13.1	11.5	8.5	7.0	6.0	4.6		22
24	15.0	12.5	10.5	7.9	6.5	4.7	4.6	12.4	11.0	8.2	6.8	5.9	4.5	3.5	24
26	14.1	11.8	10.0	7.8	6.0	4.6	4.5	11.7	10.6	7.9	6.6	5.8	4.4	3.5	26
28	13.3	11.1	9.5	7.3	5.6	4.5	4.4	11.0	10.0	7.6	6.3	5.7	4.3	3.5	28
30	12.5	10.4	8.6	6.9	5.3	4.4	4.2	10.3	9.4	7.3	6.1	5.6	4.2	3.5	30
32	11.7	9.9	8.2	6.5	5.0	4.3	4.0	9.6	8.9	7.0	5.9	5.5	4.1	3.5	32
34	10.9	9.6	7.8	6.1	4.7	4.2	3.9	9.0	8.6	6.6	5.6	5.3	4.0	3.5	34
36	10.1	9.0	7.4	5.8	4.5	4.1	3.7	8.4	8.1	6.3	5.4	5.1	3.8	3.4	36
38	9.5	8.5	7.0	5.5	4.3	4.1	3.6	7.8	7.7	6.0	5.1	4.9	3.6	3.3	38
40	8.9	8.1	6.7	5.2	4.0	4.0	3.5	7.3	7.3	5.6	4.8	4.7	3.4	3.1	40
42	8.4	7.5	6.4	5.0	3.8	3.7	3.3	6.8	6.8	5.3	4.6	4.5	3.2	2.9	42
44	7.9	7.0	6.1	4.7	3.6	3.6	3.2	6.3	6.3	4.9	4.3	4.3	3.0	2.7	44
46	7.4	6.5	5.8	4.5	3.4	3.5	3.1	5.8	5.9	4.6	4.0	4.1	2.9	2.5	46
48	7.0	6.1	5.5	4.3	3.1	3.2	2.9	5.4	5.5	4.3	3.8	3.9	2.7	2.3	48
50	6.6	5.7	5.2	4.0	2.8	3.1	2.8	5.0	5.1	4.0	3.5	3.7	2.6	2.1	50
52	6.2	5.1	4.7	3.8	2.7	2.9	2.6	4.6	4.6	3.7	3.2	3.5	2.4	1.9	52
54	5.8	4.7	4.3	3.7	2.5	2.6	2.4	4.2	4.2	3.4	3.0	3.3	2.2	1.8	54
56	5.5	4.4	4.0	3.5	2.4	2.4	2.2	3.8	4.0	3.1	2.7	3.1	2.0	1.6	56
58	4.9	4.2	3.7	3.2	2.1	2.3	2.0	3.4	3.8	2.9	2.5	2.9	1.9	1.5	58
60	4.1	3.8	3.5	3.0	1.9	2.0	1.8	3.1	3.4	2.6	2.3	2.7	1.7	1.3	60
62	3.4	3.6	3.2	2.8	1.6	1.8	1.6	2.8	3.2	2.3	2.0	2.5	1.5		62
64		3.3	3.0	2.5	1.4	1.6	1.4	2.6	3.0	2.1	1.8	2.3	1.2		64
66			3.1	2.8	2.2		1.4		2.3	2.8	1.8	1.6	2.1		66
68			2.7	2.4	2.0				1.9	2.4	1.6		1.9		68
70			2.3	2.3	1.7				1.3	2.1	1.4		1.7		70
72			1.7	1.8	1.4					1.5	1.2		1.4		72
74					1.1								1.1		74
76															76
78															78
80															80
	2	2	1	1	1	1	1	2	1	1	1	1	1	1	
	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	


Remark

1. Ratings above are the rated lifting capacities when this crane is supported with the firm ground and stays in level.
2. Choose rated lifting capacity of the longer boom and radius when the actual boom length and radius are between two values in the charts.
3. The rated lifting capacities include the weight of hook block and riggings.

1. 表中给定数值是在平整坚固的地面上，整机调平状态下起重机的额定起重量；
2. 如果实际幅度介于表上两个数字之间，取较大值决定作业的起重量；
3. 表中额定起重量包括起重主钩和吊具的重量。

Load Chart - Telescopic Boom + Heavy-Duty Fixed Jib

性能表 - 主臂 + 重型副臂



Unit: t

	79.3m							84.1m							
	6m	12m	18m	24m	30m	36m	42m	6m	12m	18m	24m	30m	36m		
12														12	
13														13	
14														14	
16														16	
18														18	
20	12.4													20	
22	11.8	10.4	7.8	6.0	5.0			10.9						22	
24	11.2	9.9	7.8	6.0	4.9	4.1		10.3	9.1	6.8	5.2	4.5		24	
26	10.5	9.6	7.8	5.8	4.8	4.1	3.0	9.7	8.8	6.8	5.1	4.4	3.6	26	
28	9.9	9.0	7.8	5.6	4.7	4.0	3.0	9.1	8.3	6.8	4.9	4.0	3.6	28	
30	9.3	8.4	7.7	5.4	4.6	3.9	3.0	8.5	7.8	6.8	4.7	3.9	3.5	30	
32	8.6	8.0	7.2	5.2	4.5	3.8	3.0	8.0	7.4	5.8	4.6	3.8	3.5	32	
34	8.1	7.8	6.7	5.0	4.4	3.7	3.0	7.5	7.2	5.5	4.4	3.7	3.4	34	
36	7.6	7.3	6.3	4.8	4.2	3.6	3.0	7.0	6.7	5.2	4.2	3.5	3.4	36	
38	7.0	6.9	5.9	4.6	4.0	3.5	3.0	6.5	6.3	5.0	4.0	3.3	3.3	38	
40	6.6	6.6	5.5	4.3	3.8	3.3	2.9	6.0	6.0	4.6	3.8	3.1	3.3	40	
42	6.1	6.1	5.0	4.1	3.6	3.1	2.9	5.6	5.6	4.4	3.6	2.9	3.2	42	
44	5.7	5.7	4.5	3.9	3.4	2.8	2.7	5.2	5.2	4.1	3.4	2.8	3.2	44	
46	5.2	5.3	4.1	3.7	3.2	2.6	2.7	4.8	4.8	3.8	3.2	2.6	3.0	46	
48	4.9	4.9	3.9	3.4	3.0	2.4	2.5	4.5	4.6	3.6	3.0	2.5	2.8	48	
50	4.5	4.6	3.6	3.2	2.8	2.3	2.5	4.1	4.3	3.3	2.8	2.2	2.6	50	
52	4.1	4.1	3.3	3.0	2.6	2.2	2.3	3.8	3.8	3.1	2.6	2.1	2.4	52	
54	3.8	3.8	3.1	2.7	2.4	2.0	2.3	3.5	3.5	2.8	2.4	1.9	2.2	54	
56	3.4	3.6	2.8	2.6	2.2	1.8	2.1	3.2	3.3	2.6	2.2	1.8	2.0	56	
58	3.1	3.4	2.6	2.3	2.0	1.7	1.9	2.8	3.1	2.4	2.0	1.7	1.8	58	
60	2.8	3.1	2.3	2.1	1.8	1.5	1.7	2.6	2.8	2.2	1.9	1.4	1.7	60	
62	2.5	2.9	2.1	2.0	1.5	1.4	1.5	2.3	2.7	1.9	1.7	1.4	1.5	62	
64	2.3	2.7	1.9	1.7		1	1.3	2.2	2.5	1.7			1.4	64	
66	2.1	2.5	1.6	1.5				1.9	2.3	1.5				66	
68	1.8	2.2	1.4					2.0						68	
70	1.6	1.9						1.7						70	
72		1.4						1.3						72	
74														74	
76														76	
78														78	
80														80	
	1	1	1	1	1	1	1	1	1	1	1	1	1		
	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0		


Remark

1. Ratings above are the rated lifting capacities when this crane is supported with the firm ground and stays in level.
2. Choose rated lifting capacity of the longer boom and radius when the actual boom length and radius are between two values in the charts.
3. The rated lifting capacities include the weight of hook block and riggings.

1. 表中给定数值是在平整坚固的地面上，整机调平状态下起重机的额定起重量；
2. 如实际幅度介于表上两个数字之间，取较大值决定作业的起重量；
3. 表中额定起重量包括起重主钩和吊具的重量。

Operating Range - Telescopic Boom + Heavy-Duty Fixed Jib + Superlift Device


起升高度曲线 - 主臂 + 重型副臂 + 超起

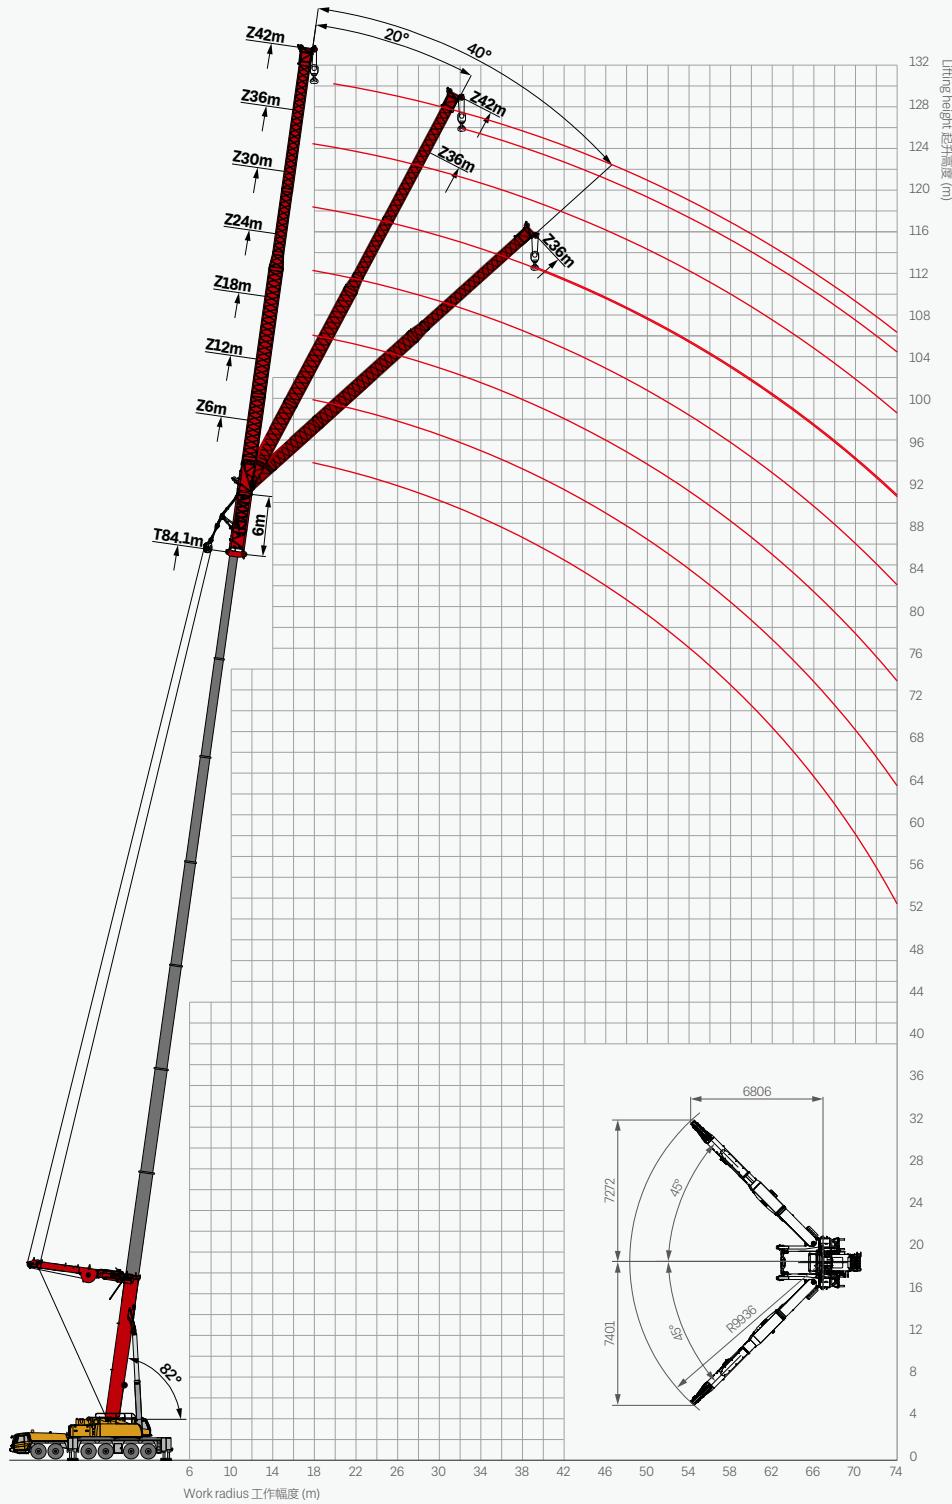

Remark: When 42m jib is mounted, the designed longest main boom length is 79.3m; when ≤36m jib is mounted, the designed longest main boom length is 84.1m.
备注: 安装 42m 副臂时，主臂最长可伸至 79.3m；安装 36m 及以下副臂时，主臂最长可伸至 84.1m。

Load Chart - Telescopic Boom + Heavy-Duty Fixed Jib + Superlift Device

性能表 - 主臂 + 重型副臂 + 超起



Unit: t

	50.0m							54.9m							
	6m	12m	18m	24m	30m	36m	42m	6m	12m	18m	24m	30m	36m	42m	
11	51.6							45.7							11
12	50.9	39.2						45.3	38.0						12
13	50.1	38.3	30.7					44.6	37.0	29.7					13
14	46.8	37.1	29.8	22.5				39.6	35.0	27.7	21.5	14.8			14
16	40.2	34.8	27.8	21.5	15.8			34.2	33.0	26.3	20.5	14.0	11.5	9.8	16
18	34.9	32.8	26.3	20.5	14.8	12.2	10.3	20.1	20.7	21.0	16.1	11.5	9.5	7.9	18
20	30.6	30.8	24.8	19.5	14.0	11.5	9.8	29.8	30.3	24.8	19.5	13.3	11.0	9.3	20
22	26.8	27.3	23.4	18.4	13.3	11.0	9.3	26.1	26.6	23.3	18.4	12.7	10.4	8.8	22
24	23.7	24.3	22.3	17.3	12.7	10.4	8.8	23.0	23.5	22.1	17.3	12.0	10.0	8.4	24
26	20.9	21.5	21.1	16.1	12.0	9.9	8.3	20.1	20.7	21.0	16.1	11.5	9.5	7.9	26
28	18.5	19.1	19.7	14.9	11.5	9.4	7.9	17.8	18.3	19.0	14.9	10.9	9.1	7.5	28
30	16.4	17.0	17.7	13.9	10.9	9.0	7.5	15.7	16.2	16.9	13.9	10.5	8.8	7.3	30
32	14.5	15.2	15.8	12.8	10.5	8.5	7.2	13.8	14.4	15.0	12.8	10.0	8.4	6.9	32
34	12.8	13.5	14.1	11.4	10.0	8.2	6.8	12.1	12.7	13.3	11.7	9.5	8.0	6.7	34
36	11.3	12.0	12.7	10.9	9.5	7.8	6.5	10.6	11.2	11.9	11.2	9.1	7.7	6.3	36
38	10.0	10.6	11.3	10.4	9.1	7.4	6.3	9.3	9.8	10.5	10.8	8.6	7.4	6.1	38
40	8.7	9.4	10.0	10.0	8.6	7.0	5.9	8.0	8.6	9.3	9.9	8.3	7.0	5.8	40
42	7.6	8.3	8.9	9.5	8.3	6.7	5.7	7.0	7.5	8.2	8.8	7.9	6.8	5.6	42
44	6.6	7.2	7.9	8.5	7.9	6.4	5.4	5.9	6.5	7.2	7.8	7.5	6.5	5.3	44
46	5.6	6.3	7.0	7.6	7.5	6.1	5.2	4.9	5.5	6.3	6.8	7.1	6.3	5.1	46
48	4.8	5.4	6.1	6.7	7.1	5.8	4.9	4.0	4.6	5.3	6.0	6.8	5.9	4.9	48
50	3.9	4.6	5.3	6.0	6.8	5.4	4.7	3.2	3.8	4.6	5.2	6.4	5.7	4.7	50
52	3.1	3.8	4.6	5.2	6.4	5.2	4.4	2.4	3.1	3.8	4.4	6.0	5.3	4.4	52
54	2.4	3.1	3.9	4.5	5.9	4.9	4.2	1.7	2.4	3.1	3.8	5.8	4.9	4.2	54
56	1.8	2.5	3.2	3.9	5.4	4.6	4.1	1.1	1.7	2.5	3.0	5.5	4.5	4.1	56
58		1.9	2.6	3.2	5.1	4.3	3.8		1.1	1.9	2.4	5.3	4.3	3.8	58
60		1.3	2.0	2.7	4.9	3.9	3.6			1.2	1.9	5.0	4.1	3.6	60
62			1.5	2.2	4.4	3.7	3.4				1.4	4.2	4.0	3.3	62
64			1.0	1.7	3.2	3.5	3.0					3.4	3.8	3.1	64
66				1.2	2.8	3.4	2.7					2.7	3.2	2.9	66
68					2.5	3.2	2.6					2.0	2.6	2.8	68
70					1.9	3.1	2.4					1.5	2.0	2.4	70
72						2.5	2.3						1.4	1.8	72
74						1.9	2.2							1.3	74
76						1.4	1.8								76
78							1.3								78
80															80
T_n	4	3	3	2	2	1	1	4	3	3	2	2	1	1	T_n
C_{m/s}	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	C_{m/s}


Remark

1. Ratings above are the rated lifting capacities when this crane is supported with the firm ground and stays in level.
2. Choose rated lifting capacity of the longer boom and radius when the actual boom length and radius are between two values in the charts.
3. The rated lifting capacities include the weight of hook block and riggings.

1. 表中给定数值是在平整坚固的地面上，整机调平状态下起重机的额定起重重量；
2. 如果实际幅度介于表上两个数字之间，取较大值决定作业的起重量；
3. 表中额定起重重量包括起重主钩和吊具的重量。

Load Chart - Telescopic Boom + Heavy-Duty Fixed Jib + Superlift Device

性能表 - 主臂 + 重型副臂 + 超起



Unit: t

	59.8m							64.7m							
	6m	12m	18m	24m	30m	36m	42m	6m	12m	18m	24m	30m	36m	42m	
11															11
12															12
13															13
14	41.3														14
16	39.4	34.0	25.6					35.0	30.4						16
18	34.0	32.0	25.0	19.8	14.0			34.0	29.0	24.0	19.8				18
20	29.6	30.0	24.0	18.8	13.3	11.4		29.7	27.7	23.0	18.8	13.3			20
22	25.9	26.3	23.0	17.8	12.7	10.7	8.5	25.8	26.2	22.0	17.8	12.7	10.7	8.2	22
24	22.7	23.2	22.0	16.8	12.0	10.4	8.2	22.7	23.0	21.0	16.8	12.0	10.4	7.8	24
26	20.0	20.4	21.0	15.8	11.5	9.9	7.8	19.9	20.4	20.0	15.8	11.5	9.9	7.5	26
28	17.6	18.0	18.6	14.8	10.9	9.5	7.5	17.5	18.0	18.5	14.8	10.9	9.5	7.2	28
30	15.4	15.9	16.5	14.0	10.5	9.1	7.2	15.5	15.9	16.4	14.0	10.5	9.1	6.9	30
32	13.5	14.0	14.7	13.2	10.0	8.8	6.9	13.6	14.0	14.5	13.2	10.0	8.8	6.5	32
34	11.9	12.4	13.0	12.4	9.5	8.4	6.5	11.9	12.3	12.8	12.4	9.5	8.4	6.3	34
36	10.4	10.8	11.5	11.6	9.1	8.0	6.3	10.4	10.8	11.3	11.6	9.1	8.0	6.1	36
38	9.1	9.5	10.2	10.7	8.6	7.8	6.1	9.1	9.4	10.0	10.5	8.6	7.8	5.8	38
40	7.8	8.3	8.9	9.4	8.3	7.5	5.8	7.9	8.2	8.8	9.3	8.3	7.5	5.6	40
42	6.6	7.1	7.8	8.3	7.9	7.2	5.6	6.7	7.1	7.7	8.1	7.9	7.2	5.3	42
44	5.7	6.2	6.8	7.3	7.5	6.9	5.3	5.7	6.0	6.6	7.2	7.5	6.9	5.2	44
46	4.7	5.3	5.8	6.4	7.1	6.7	5.2	4.7	5.1	5.7	6.2	7.1	6.7	4.9	46
48	3.8	4.3	4.9	5.5	6.7	6.4	4.9	3.9	4.3	4.8	5.4	6.8	6.4	4.7	48
50	3.0	3.5	4.1	4.7	6.4	5.9	4.7	3.0	3.5	4.0	4.6	6.5	5.9	4.6	50
52	2.2	2.8	3.4	4.0	6.2	5.5	4.6	2.3	2.7	3.2	3.8	6.3	5.5	4.3	52
54	1.6	2.1	2.7	3.3	5.9	5.1	4.3	1.6	2.0	2.5	3.1	6.1	5.1	4.2	54
56		1.4	2.0	2.6	5.7	4.7	4.2		1.3	1.9	2.5	5.9	4.8	4.0	56
58			1.5	2.0	5.3	4.5	4.0			1.3	1.9	4.9	4.7	3.8	58
60				1.5	4.4	4.3	3.8				1.3	4.1	4.5	3.5	60
62					1.0	3.6	4.1	3.5				3.3	3.7	3.2	62
64						2.9	3.3	3.2				2.5	3.0	2.9	64
66						2.1	2.6	2.9				1.8	2.2	2.7	66
68						1.4	2.0	2.4				1.2	1.6	2.0	68
70							1.3	1.8					1.0	1.4	70
72								1.2							72
74															74
76															76
78															78
80															80
T_n	4	3	2	2	2	1	1	3	3	2	2	1	1	1	T_n
C_{m/s}	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	C_{m/s}


Remark

1. Ratings above are the rated lifting capacities when this crane is supported with the firm ground and stays in level.
2. Choose rated lifting capacity of the longer boom and radius when the actual boom length and radius are between two values in the charts.
3. The rated lifting capacities include the weight of hook block and riggings.

1. 表中给定数值是在平整坚固的地面上，整机调平状态下起重机的额定起重重量；
2. 如果实际幅度介于表上两个数字之间，取较大值决定作业的起重量；
3. 表中额定起重重量包括起重主钩和吊具的重量。

Load Chart - Telescopic Boom + Heavy-Duty Fixed Jib + Superlift Device

性能表 - 主臂 + 重型副臂 + 超起



Unit: t

	69.6m							74.5m							
	6m	12m	18m	24m	30m	36m	42m	6m	12m	18m	24m	30m	36m	42m	
11															11
12															12
13															13
14															14
16															16
18	32.7	26.5	23.0					29.0							18
20	29.8	25.9	22.0	17.0				28.6	23.5	20.0					20
22	26.0	25.4	21.0	16.3	12.0			7.8	26.3	23.0	19.0	15.6			22
24	22.8	23.2	20.0	15.6	11.5	10.0	7.5	23.1	22.5	18.5	15.0	10.9	9.3	7.2	24
26	20.1	20.4	19.0	15.0	10.9	9.5	7.2	20.4	20.5	18.0	14.4	10.5	8.9	6.9	26
28	17.7	18.0	18.0	14.4	10.5	9.0	6.9	18.0	18.1	17.5	13.8	10.0	8.5	6.5	28
30	15.6	15.9	16.3	13.8	10.0	8.6	6.5	15.8	16.0	16.5	13.1	9.5	8.1	6.3	30
32	13.8	14.0	14.5	13.1	9.5	8.4	6.3	14.0	14.2	14.6	12.5	9.1	7.8	6.1	32
34	12.0	12.3	12.8	12.5	9.1	8.0	6.1	12.4	12.5	13.0	11.8	8.6	7.5	5.8	34
36	10.5	10.8	11.3	11.8	8.6	7.7	5.8	10.9	11.0	11.4	11.0	8.3	7.2	5.6	36
38	9.2	9.4	10.0	10.4	8.3	7.5	5.6	9.4	9.7	10.1	10.5	7.9	6.9	5.3	38
40	7.9	8.3	8.8	9.3	7.9	7.2	5.3	8.3	8.4	8.9	9.2	7.5	6.7	5.2	40
42	6.9	7.1	7.7	8.2	7.5	6.9	5.2	7.1	7.3	7.8	8.1	7.1	6.5	4.9	42
44	5.8	6.1	6.7	7.1	7.1	6.7	4.9	6.1	6.3	6.7	7.1	6.8	6.2	4.7	44
46	4.9	5.2	5.7	6.2	6.8	6.5	4.7	5.1	5.3	5.8	6.2	6.5	6.0	4.6	46
48	4.0	4.3	4.8	5.3	6.5	6.2	4.6	4.3	4.5	4.9	5.4	6.3	5.8	4.3	48
50	3.1	3.5	4.0	4.5	6.3	6.0	4.3	3.5	3.7	4.1	4.5	6.1	5.6	4.2	50
52	2.5	2.8	3.3	3.8	6.1	5.8	4.2	2.7	2.9	3.3	3.9	5.9	5.3	4.0	52
54	1.8	2.1	2.6	3.1	5.9	5.6	4.0	2.0	2.2	2.7	3.2	5.7	4.9	3.8	54
56	1.1	1.4	1.9	2.4	5.7	5.3	3.8	1.3	1.6	2.1	2.5	5.5	4.5	3.5	56
58			1.3	1.8	4.8	4.9	3.5		1.0	1.4	1.8	4.8	4.1	3.2	58
60				1.2	4.0	4.3	3.2				1.3	4.0	3.8	2.9	60
62					3.2	3.5	2.9					3.2	2.6	2.8	62
64					2.4	2.8	2.8					2.4	2.3	2.7	64
66					1.7	2.1	2.5					1.7	2.1	2.4	66
68					1.1	1.5	1.8					1.1	1.5	1.8	68
70							1.2							1.1	70
72															72
74															74
76															76
78															78
80															80
	3	2	2	2	1	1	1	3	2	2	2	1	1	1	
	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	


Remark

- Ratings above are the rated lifting capacities when this crane is supported with the firm ground and stays in level.
- Choose rated lifting capacity of the longer boom and radius when the actual boom length and radius are between two values in the charts.
- The rated lifting capacities include the weight of hook block and riggings.

1. 表中给定数值是在平整坚固的地面上，整机调平状态下起重机的额定起重重量；
 2. 如果实际幅度介于表上两个数字之间，取较大值决定作业的起重量；
 3. 表中额定起重重量包括起重主钩和吊具的重量。

Load Chart - Telescopic Boom + Heavy-Duty Fixed Jib + Superlift Device

性能表 - 主臂 + 重型副臂 + 超起



Unit: t

	79.3m							84.1m							
	6m	12m	18m	24m	30m	36m	42m	6m	12m	18m	24m	30m	36m		
11														11	
12														12	
13														13	
14														14	
16														16	
18	25.0													18	
20	24.0	20.5						20.0						20	
22	22.5	20.1	17.0	15.0				18.5	16.1	14.1				22	
24	21.1	19.6	16.2	14.4	10.5	8.9		17.0	15.8	14.0	13	10.0	8.5	24	
26	19.0	19.2	15.6	13.8	10.0	8.5	6.5	15.5	15.5	13.9	12.5	9.5	8.1	26	
28	17.7	18.3	15.0	13.1	9.5	8.1	6.3	14.5	15.1	13.8	12.0	9.1	7.8	28	
30	16.3	16.2	14.5	12.5	9.1	7.8	6.1	13.5	14.8	13.5	11.5	8.6	7.5	30	
32	14.3	14.4	13.9	11.8	8.6	7.5	5.8	12.1	14.5	13.2	11.2	8.3	7.2	32	
34	12.7	12.8	13.1	11.0	8.3	7.2	5.6	11.0	13.1	12.7	10.8	7.9	6.9	34	
36	11.2	11.2	11.7	10.5	7.9	6.9	5.3	9.9	11.5	11.9	10.5	7.5	6.7	36	
38	9.8	9.9	10.3	10.1	7.5	6.7	5.2	9.0	10.2	10.5	10.1	7.1	6.5	38	
40	8.6	8.7	9.0	9.4	7.1	6.5	4.9	8.1	9.0	9.4	9.8	6.8	6.2	40	
42	7.5	7.5	7.9	8.3	6.8	6.2	4.7	7.3	7.9	8.1	9.4	6.5	6.0	42	
44	6.4	6.5	6.9	7.3	6.5	6.0	4.6	6.6	6.8	7.2	8.5	6.3	5.8	44	
46	5.5	5.6	6.0	6.4	6.3	5.8	4.3	5.9	5.9	6.2	7.5	6.1	5.6	46	
48	4.7	4.7	5.1	5.5	6.1	5.6	4.2	5.1	5.1	5.4	6.6	5.9	5.3	48	
50	3.9	3.9	4.4	4.7	5.9	5.3	4.0	4.3	4.3	4.6	5.7	5.7	4.9	50	
52	3.1	3.2	3.6	3.9	5.7	4.9	3.8	3.5	3.5	3.8	4.9	5.5	4.5	52	
54	2.4	2.5	2.9	3.2	5.5	4.5	3.5	2.8	2.8	3.1	4.1	5.3	4.1	54	
56	1.7	1.8	2.2	2.6	5.3	4.1	3.2	2.1	2.1	2.5	3.4	5.0	3.8	56	
58	1.1	1.2	1.7	2.0	4.9	3.8	2.9	1.5	1.6	1.9	2.8	4.8	2.6	58	
60			1.0	1.5	4.1	2.6	2.8	1.0	1.0	1.3	2.2	4.4	2.3	60	
62					3.3	2.3	2.7				1.7	3.6	2.1	62	
64					2.5	2.1	3				1.2	2.8	1.8	64	
66					1.8	2	2.5					2.1	1.5	66	
68					1.2	1.5	1.8					1.5	1.3	68	
70							1.15							70	
72														72	
74														74	
76														76	
78														78	
80														80	
	2	2	2	2	1	1	1	2	2	2	1	1	1		
	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0		

Remark

- Ratings above are the rated lifting capacities when this crane is supported with the firm ground and stays in level.
- Choose rated lifting capacity of the longer boom and radius when the actual boom length and radius are between two values in the charts.
- The rated lifting capacities include the weight of hook block and riggings.

1. 表中给定数值是在平整坚固的地面上，整机调平状态下起重机的额定起重量；
 2. 如果实际幅度介于表上两个数字之间，取较大值决定作业的起重量；
 3. 表中额定起重量包括起重主钩和吊具的重量。



SANY GROUP CRANE BU

SANY Mobile Crane Industrial Park, No.168 Jinzhou Avenue, Jinzhou Development Zone, Changsha City,
Hunan Province, P.R. China Zip 410600

Consulting sanycrane@sanygroup.com (Crane BU) / crd@sany.com.cn (IHQ)
After-sales Service 0086-400 6098 318

Reminder:
Any change in the technical parameters and configuration due to product modification or upgrade may occur without prior notice.
The machine in the picture may include additional equipment. This brochure is for reference only, and goods in kind shall prevail.
Copyright at SANY. No part of this brochure may be copied or used for any purpose without written approval from SANY.

© Edited in March 2023

三一集团起重机事业部

中国湖南长沙金洲开发区金洲大道 168 号 三一汽车起重机产业园 邮编: 410600
咨询: sanycrane@sanygroup.com (重起事业部) / crd@sany.com.cn (国际总部)
海外售后服务: 0086-400 6098 318

温馨提示:

由于技术不断更新, 技术参数及配置如有更改, 恕不另行通知。图中机器可能包括附加设备, 本画册仅供参考, 以实物为准。
版权归三一所有, 未经三一书面许可, 本画册任何内容不得被复制用于任何目的。

© 2023 年 3 月版

